特點

●雷射標示器可分為直線、十字線及點式三種，其提供極佳的輔助標線功能，能有效提升加工效率及降低加工成本，提高產業競爭力。

●應用於木材加工、鐵材加工、輪胎成型加工、橡膠加工、高爾夫球具加工、組桿、布料加工、焊接加工、PCB加工...等。

規格
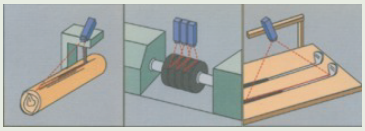
型號	FML-G201	FML-G202	FML-G203	FML-G205
波長	532 nm 可見綠光(GREEN)			
輸出功率	1mW	2mW	3mW	5mW
投射距離	<1M	<2M	<3M	<6M
標線長度	1~1.3M	2~2.5M	3~4M	5~6M
標線寬度	≦ 0.5mm	≦ 1.0mm	≦ 1.5mm	≦ 3.0mm
	固定焦距(Focus Fixed)			
輸入電壓	5 VDC (AC to DC Adaptor PS1 / PS3 / PS5/ PS3C / PS5C/ PS3C-S / PS5C-S)			
操作溫度	10 ~ 40 °C			
安全等級	Class IIIa			
使用壽命	> 12,000 小時 (hr)			
外觀尺寸	D 20 x L 90 (mm)			
重量	62 ± 5 公克（g）			
適用行業	●焊接加工 Welding process ●鐵材加工 Metal working ●木材加工 Wood working ●成衣加工 Garment processing ●輪胎成型加工 Tire Building ●高爾夫球桿組裝 Golf assembly ●橡膠加工 Rubber processing ●印刷品加工 Print processing ●PCB 加工 PCB processing ●自行車加工 Bicycle processing ●分條加工 Slitting processing			
備註	1. 若未使用原廠設計之完整腳座固定雷射頭時，建議使用非金屬材質(如：塑鋼、電木)，以隔絕雷射頭與機械設備的電位接觸。 If you do not use the original design of a complete mounting fixed to the laserhead, recommend the use of non-metallic materials (such as: Plastic and bakelite),in order to cut off the laser head and the equipment conductive contact. 2. 雷射光對人體眼睛的視網膜會造成傷害，使用操作時請勿直視光源。 Do not catch your sight with the beam. It may result in the harm to your eyes. 3. 請勿自行調整或拆裝雷射頭上之零件(含螺絲)，以避免損壞狀況擴大，突增不必要的維修成本。 Please do not adjust the laser head or removable parts (including screws), to avoid damage to expand, and inviting unnecessary maintenance costs.			
應用範例