AUSPICIOUS

CONTROL COMPONENTS
歐式防水型按鈕開關

C US

TÜV Rheinland Product Safety | BAUART GEPRUFT TYPE APPROVED

CE

2008/B

Standard and Certifications

CSA Certified 1689803

CSA認證相關資料

Applicable Requirements

CAN/CSA-C22.2 NO. 0 – M91, General Requirements – Canadian Electrical.Part II

CAN/CSA-C22.2 NO.14.05-Industrial Control Equipment

CSA Std C22.2 NO.65.93-Wire Connector

UL File NO. E247577

Ul認證相關資料

UL Std NO. 508, 17th Ed-Industrial Control Equipment to the requirements of CSA standard NO. 14-05

Auxiliary device, contact rated 120VAC 6A, resistive, heavy pilot duty or A600 with NC and NO contact, used

for push button switches, selector switches, double push button switches, push button switches with Illuminated, selector switch with illuminated, pilot lights.

TUV Rheinland Group

TUV認證相關資料

License No. R50062119

EN 60947-1 : 2004

EN 60947-5-1 : 2004

License No. R50062158

EN 60947-1 : 2004

EN 60947-5-1 : 2004

EN 60947-5-5 : 1997

CE Marked : EN60947-5-1

Rating :

Thermal current 1th 10A 50/60HZ

Insulation Voltage Ui 600V

Enclosed thermal current 1the 10A

Short-Circuit current 1000A

AC-15 120V 6A, 240V 3A

AC-12 480V 1.5A, 600V 1.2A

DC-12 120V 2.2A, 240V 0.6A, 480V 0.4A

IP-Enclosure IP65

Ambient temperature :–20 to 60°C

Contact resistance : 50 mΩ max.

產品規格：

接點最大熱電壓熱電流600V 10A

防護等級 IP65

工作溫度 -20°C~60°C

接點接觸點阻 最大50mΩ

接點額定值：

AC-15 120V 6A , 240V 3A

AC-12 480V 1.5A , 600V 1.2A

DC-12 120V 2.2A , 240V 0.6A

480V 0.4A

Life :

Push buttons : 1 million operations

Contact blocks : 1 million operations

Selector and key selector : 600,000 operations

工作壽命：

按鈕開關 1百萬次以上

選擇與鑰匙開關 600,000以上

電氣壽命 1百萬次以上

Panel cut - out



Dimensions

	Series	22ø	25ø	30ø
A	Standard spacing	30	30	38
	Mushroom head 40ø	42	42	42
	Long knob selector	44	44	44
B		24.2	26.6	32
C		22.5ø	25.4ø	30.5ø

Components parts

S-9 Filament Lamp Rated Voltage 鎢絲燈泡

6V, 12V, 24V, 30V
36V, 48V, 60V

Lamp holder, contact block 1/O or 1/C with coupler 接點連接座含燈座



S-9 Neon Lamp Rated Voltage 氖氣燈泡

110V, 220V, 380V, 440V
colour : Red, Green

Contact block 1/O (N/O), (1a) A接點 1/C (N/C), (1b) B接點



S-9 Led Lamp Rated Voltage LED燈泡

6V, 12V, 24V
110V/220V
220V/440V
colour : Red, Green, Orange Yellow, Blue, White

Contact block with coupler 1O/C,(N/O+N/C),(1a+1b) 接點連接座含接點



Lamp Holder 燈座



PLN	22	7	R	N
Type	Mounting hole	Voltage	Lens colour	Lens colour

Type	Mounting hole		Voltage	Lens colour	Lens colour
PLN22 PLNS22 PLN22A , PLN25A PLN22B , PLN25B PLN22C , PLN25C L22 PLN30 PLT22 W/TR	22 : 22ø 25 : 25ø 30 : 30ø	1 2 3 4 5 6 7 8	110V 220V 380V 440V 6V 12V 24V 30V	R: Red G: Green Y: Yellow O: Orange BL: Blue C : Clear W: White	L:Led F:Filament bulb N:Neon lamp L:LED燈 F:鎢絲燈 N:氖氣燈

PLN-22 22φ 平頭指示燈



PLN-30 30φ 凸頭指示燈

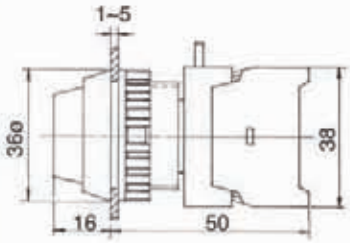

PLNS-22 22φ 方框指示燈

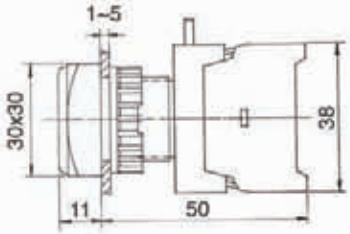

PLN-22C 22φC型指示燈
PLN-25C 25φC型指示燈

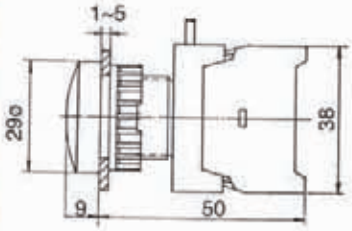

PLN-22A 22φ 凸頭指示燈
PLN-25A 25φ 凸頭指示燈



L22, 22ø LED lamp 22φ 經濟型指示燈



PLN-22B 22φB型指示燈
PLN-25B 25φB型指示燈

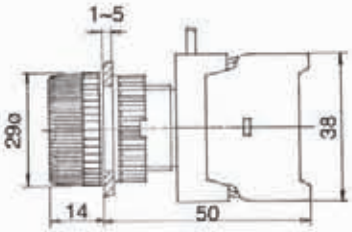

PLT-22 22φ 變壓器式指示燈
Transformer pilot lamp

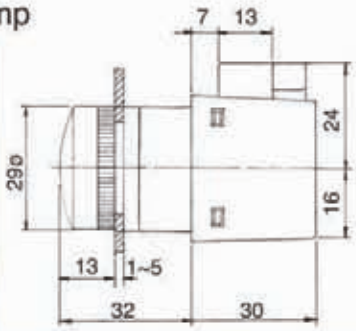

XB	22	1	O/C	R
Type	Mounting hole	No.of contact	Type of contact	Lens colour
XB,GBF,PBF:Flat head XBL,GBL,PBL:Long head XBS:Square head XLS:Square long head XBG:Guard ring XGS:Guard ring square XE,EB,GEB,XES:Mushroom head 40ø BXE,BEB:Mushroom head 60ø LEB,GLEB:Latching head PF,EPF,GPF,GEPF:Push on-Push off	22 : 22ø 30 : 30ø	1 2 3 4	O: N/O(a) C: N/C(b) O/C: N/O+N/C 1a+1b O:1A接點 C:1B接點 O/C:1A1B接點	R: Red G: Green Y: Yellow BL: Blue BK: Black W: White

XB22-1/O　22φXB型平頭按鈕



XLS22-1/O　XLS22-1O/C
XLS22-1/C
22φ方框凸頭按鈕



XB22-1O/C　22φXB型平頭按鈕
(1A1B接點)



XBG22-1/O　XBG22-1O/C
XBG22-1/C
22φ護圈型平頭按鈕



XBL22-1/O　XBL22-1O/C
XBL22-1/C
22φ凸頭按鈕



XGS22-1/O　XGS22-1O/C
XGS22-1/C
22φ護圈型方框平頭按鈕



XBS22-1/O　XBS22-1O/C
XBS22-1/C
22φ方框平頭按鈕



XE22-1/O　XE22-1O/C
XE22-1/C
22φXE型大頭按鈕

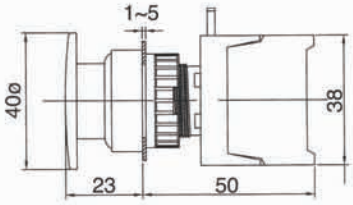

BXE22-1/O
BXE22-1/C

BXE22-1O/C
22φBXE型特大頭按鈕

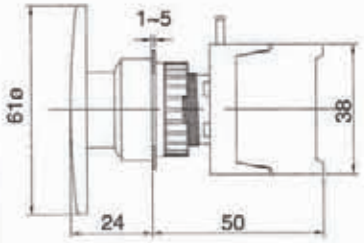

XES22-1/O
XES22-1/C

XES22-1O/C
22φ方框大頭按鈕



GBF22-1/O
GBF22-1/C

GBF22-1O/C
22φGBF型平頭按鈕



GEB22A-1/O
GEB22A-1/C

GEB22A-1O/C
22φGEB型特大頭按鈕

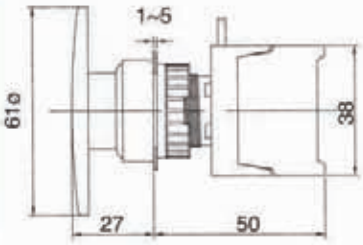

GPF22-1O/C
22φ維持型平頭按鈕



GLEB22-1/C
22φGLEB型緊急按鈕
(1B接點)

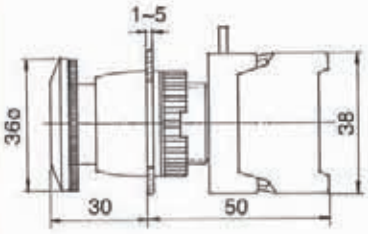

GEPF22-1O/C
22φ維持型大頭按鈕

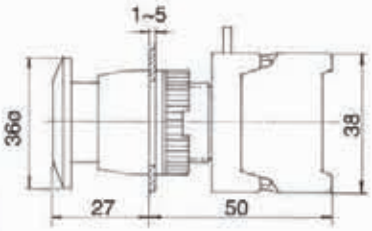

GLEB22-1O/C
22φGLEB型緊急按鈕
(1A1B接點)

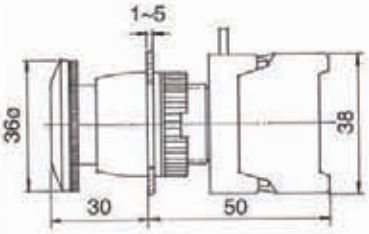

GEB22-1/O
GEB22-1/C

GEB22-1O/C
22φGEB型大頭按鈕

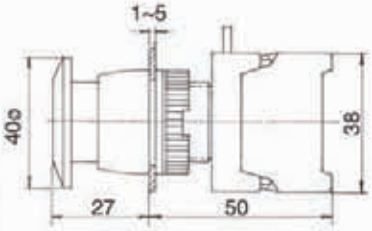

LMB22-1/C LMB22-1O/C Latching stop
22φLMB型緊急按鈕

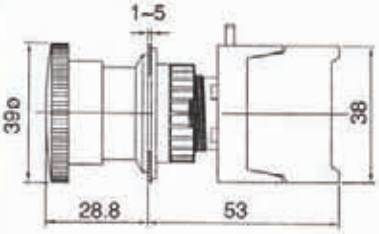

PBF22-1/O(N/O)
PBF22-1/C(N/C)
22φ 電鍍環平頭按鈕



EB22-1/O
EB22-1/C
EB22-1O/C
22φ 電鍍環大頭按鈕

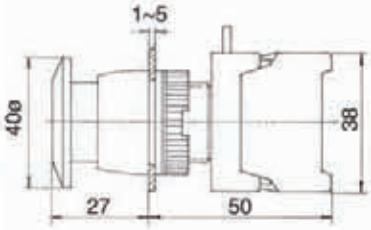

PBF22-1O/C
22φ 電鍍環平頭按鈕
(1A1B接點)



BEB22-1/O
BEB22-1/C
BEB22-1O/C
22φ 電鍍環特大頭按鈕

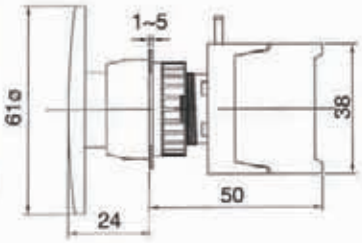

PBL22-1/O
PBL22-1/C
PBL22-1O/C
22φ 電鍍環凸頭按鈕

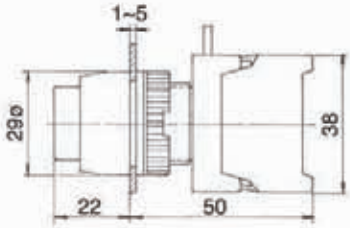

LEB22-1/C Latching
22φ 電鍍環緊急按鈕
(1B接點)

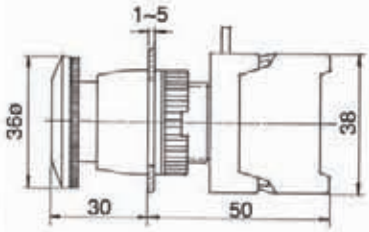

PF22-1O/C Push ON-Push OFF
22φ 電鍍環維持型平頭按鈕

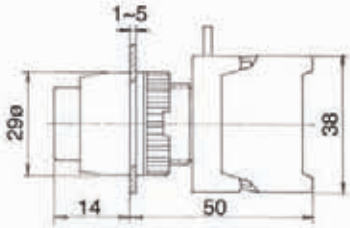

LEB22-1O/C Latching
22φ 電鍍環緊急按鈕
(1A1B接點)

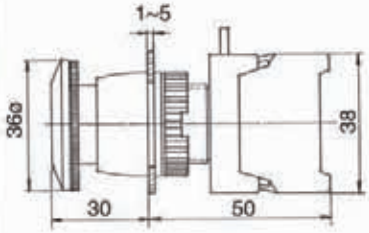

EPF22-1O/C Push ON-Push OFF
22φ 電鍍環維持型大頭按鈕

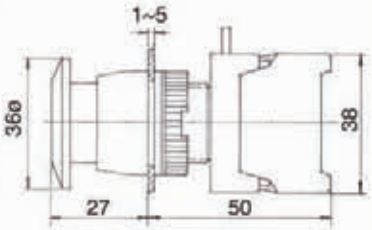

ILLUMINATED PUSH BUTTON SWITCHES,IP65

AUSPICIOUS

LXB	22	2	1	O/C	R	L
Type	Mounting hole	Voltage	No.of contact	Type of contact	Lens colour	Bulb type
LBF,LXB:GLBF,PFL,GPFL:Flat head LBS:Square head LBL,LXL:Long head LXG:Guard head LXLS:Long head square LXGS:Guard head square EBL,LXE EPFL:Mushroom head 40ø BLXE:Mushroom head 60ø LXES:Mushroom head square 40ø	22 : 22ø 30 : 30ø	1:110V 2:220V 3:380V 4:440V 5:6V 6:12V 7:24V	1 2 3 4	O: N/O(a) C: N/C(b) O/C: N/O+N/C 1a+1b O:1A接點 C:1B接點 O/C: 1A1B接點	R: Red G: Green Y: Yellow BL: Blue W: White	L:Led F:Filament bulb N:Neon lamp L:LED燈 F:鎢絲燈 N:氖氣燈

LXB22-1/O
LXB22-1/C

LXB22-1O/C
22φLXB型照光平頭按鈕



LXG22-1O/C
22φ護圈型照光平頭按鈕
(1A1B接點)

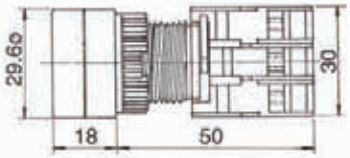

LBS22-1/O
LBS22-1/C

LBS22-1O/C
22φ方框照光平頭按鈕



LXLS22-1/O
LXLS22-1/C

LXLS22-1O/C
22φ方框照光凸頭按鈕

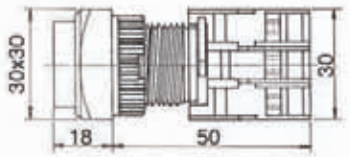

LXL22-1/O
LXL22-1/C

LXL22-1O/C
22φLXL型照光凸頭按鈕

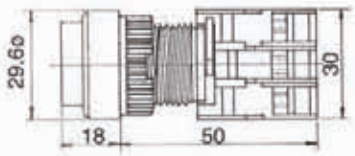

LXGS22-1/O
LXGS22-1/C

LXGS22-1O/C
22φ方框護圈照光平頭按鈕

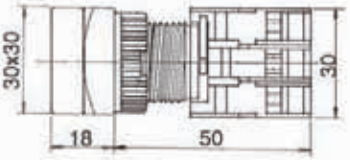

LXG22-1/O
LXG22-1/C

22φ護圈型照光平頭按鈕

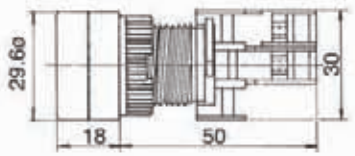

LXE22-1/O
LXE22-1/C

LXE22-1O/C
22φLXE型照光大頭按鈕

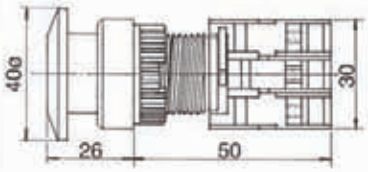

BLXE22-1/O BLXE22-1O/C
BLXE22-1/C 22φBLXE型照光特大頭按鈕

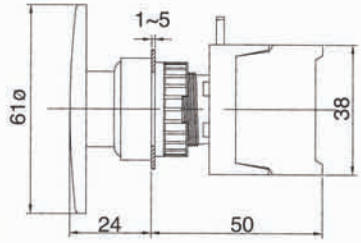

GEBL22A-1/O GEBL22A-1O/C
GEBL22A-1/C 22φGEBL型照光特大頭按鈕



LXES22-1/O LXES22-1O/C
LXES22-1/C 22φ方框照光大頭按鈕



GPFL22-1O/C Push ON-Push OFF
22φ維持型照光平頭按鈕



GLBF22-1/O GLBF22-1O/C
GLBF22-1/C 22φGLBF照光平頭按鈕



GEPFL22-1O/C Push ON-Push OFF
22φ維持型照光大頭按鈕

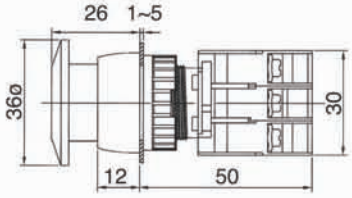

GLBL22-1/O GLBL22-1O/C
GLBL22-1/C 22φGLBL型照光凸頭按鈕



MBL22-1/C Illuminated latching stop
22φ照光緊急按鈕

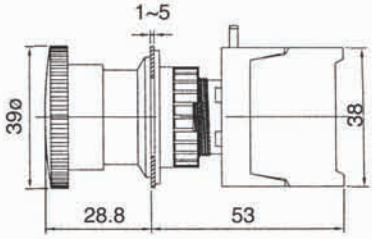

GEBL22-1/O GEBL22-1O/C
GEBL22-1/C 22φGEBL型照光大頭按鈕

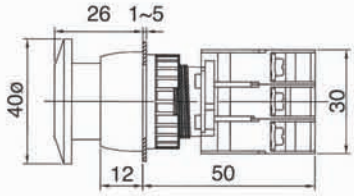

LBF22-1/O Illuminated
LBF22-1/C 22φ 電鍍環照光平頭按鈕



EPFL22-1O/C Push ON-Push OFF Illuminated
22φ 電鍍環維持型照光大頭按鈕



LBF22-1O/C Illuminated
22φ 電鍍環照光平頭按鈕
(1A1B接點)



LBL22-1/O
LBL22-1/C
LBL22-1O/C Illuminated
22φ 電鍍環照光凸頭按鈕



EBL22-1/O
EBL22-1/C
EBL22-1O/C Illuminated
22φ 電鍍環照光大頭按鈕



PFL22-1O/C Push ON-Push OFF Illuminated
22φ 電鍍環維持型照光平頭按鈕



CS	22	2	1	O/C	BK
Type	Mounting hole	Position	No.of contact	Type of contact	Lens colour
CS,GCS:Knob type LCS,GLCS:Long Knob RS,GRS:Long & spring return LRS,GLRS:Long knob spring return LS,GLS:Lever type LUS,GLUS:Lever & spring return KS,GKS:Key type drawable KSN,GKSN:Key type Non draw KSR,GKSR:Key type spring return	22 : 22ø 30 : 30ø	2:2段 Position 3:3段 Position	1 2 3 4	O: 1/O,N/O 1A接點 C: 1/C N/C 1B接點 O/C: N/O+N/C 1A1B接點 2/O: 2N/O 2A接點 2/C: 2N/C 2B接點	R: Red G: Green Y: Yellow BK: Black

2 Position 2 Position	3 Position	2 Position Spring return	3 Position Spring return	3 Position rreturn one side
2段維持	3段維持	2段右復歸	3段左右復歸	3段左復歸右維持 3段左維持右復歸
0 1 / 0–1 1 2 / 1–2	1 0 2 / 1–0–2	0 1 / 0←1 1 2 / 1←2	1→ 0←2 1 0 2	1 0 2 / 1→0—2 1 0 2 / 1—0←2

CS22-1/O , 0–1 CS22–1O/C 1–2
CS22-1/C , 1–0 22φ2段短柄電鍍環選擇

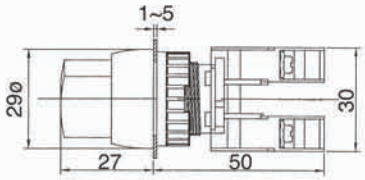

LCS22-2/O , 2N/O 1–0–2
22φ3段長柄電鍍環選擇

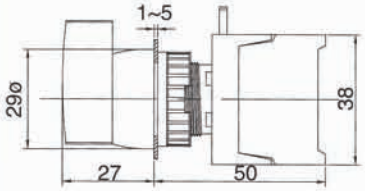

CS22-2/O , 2N/O 1–0–2
22φ3段短柄電鍍環選擇

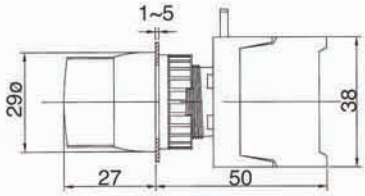

RS22-1/O 0←1
RS22-1/C 1←0 22φ2段短柄電鍍環復歸選擇

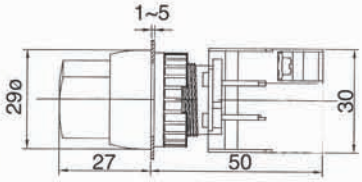

LCS22-1/O , 0–1 LCS22–1O/C 1–2
LCS22-1/C , 1–0 22φ2段長柄電鍍環選擇

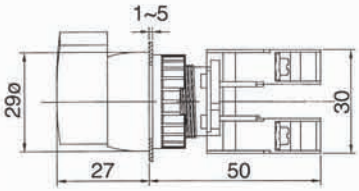

LRS22-1/O 0←1
LRS22-1/C 1←0 22φ2段長柄電鍍環復歸選擇

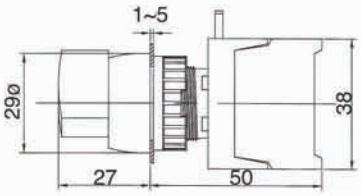

LRS22-1O/C 1←2 (1A1B接點)
22φ2段長柄電鍍環復歸選擇

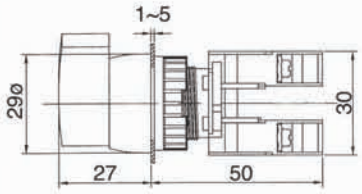

KS22-1/O 0-1 22φ2段電鍍環兩邊可抽鑰匙
KSN22-1/O 0-1 22φ2段電鍍環單抽鑰匙

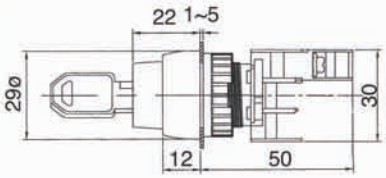

LRS22-2/O 1→0←2
22φ3段長柄電鍍環復歸選擇

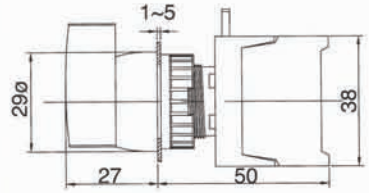

KS22-1O/C 0-1 22φ2段電鍍環兩邊可抽鑰匙
KSN22-1O/C 0-1 22φ2段電鍍環單抽鑰匙
(1A1B接點)

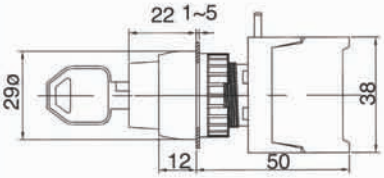

LS22-1/O 0–1
LS22-1/C 1–0
22φ2段搖柄電鍍環選擇



KSR22-1O/C 1←2 22φ2段電鍍環復歸鑰匙

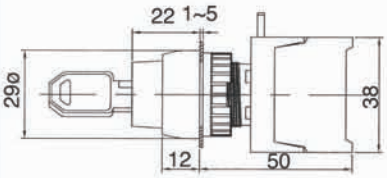

LS22-1O/C 1-2
LS22-2/O 1-2
22φ2段搖柄電鍍環選擇
(1A1B或2A接點)



KS22-2/O 1-0-2 22φ3段電鍍環三邊可抽鑰匙
KSN22-2/O 1-0-2 22φ3段電鍍環單抽鑰匙
(2A接點)

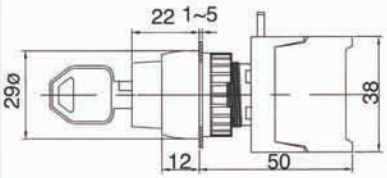

LUS22-2/O 1→0←2
LUS22-2/C 1→0←2
22φ3段搖柄電鍍環復歸選擇



KSR22-2/O 1→0←2 (左右復歸)
KSR22A-2/O 1→0–2 , KSR22B-2/O 1–0←2
(左復歸右維持) (左維持右復歸)

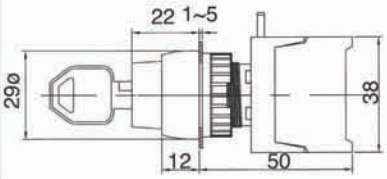

22φ3段電鍍環復歸鑰匙

GCS22-1/O N/O,0–1 , GCS22-1O/C , 1–2
GCS22-1/C N/C,1–0 22φ2段短柄選擇

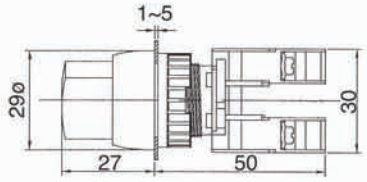

GRS22-1O/C , 1←2 22φ2段短柄復歸選擇
(1A1B接點)

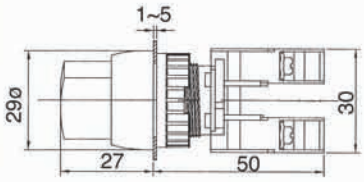

GCS22-2/O , 1–0–2 22φ3段短柄選擇

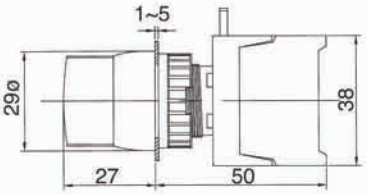

GRS22-2/O 1→0←2 (左右復歸)
GRS22A-2/O , 1→0–2 , GRS22B-2/O 1–0←2
(左復歸右維持) (左維持右復歸)

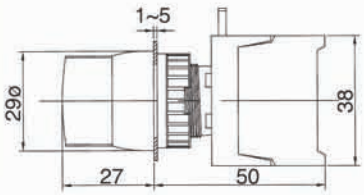

22φ3段短柄復歸選擇

GLCS22-1/O , N/O , 0–1 , GLCS22-1O/C , 1–2
GLCS22-1/C , N/C , 1–0 22φ2段長柄選擇

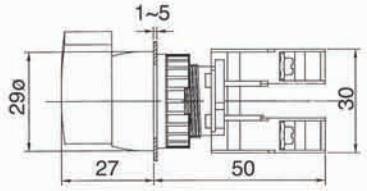

GLRS22-1/O , 0←1
GLRS22-1/C , 1←0 22φ2段長柄復歸選擇

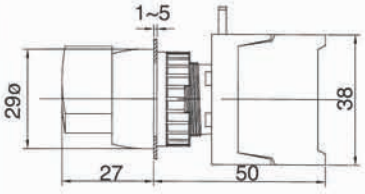

GLCS22-2/O , 1–0–2 22φ3段長柄選擇

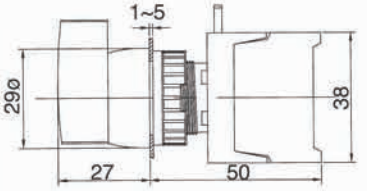

GLRS22-1O/C , 1←2 22φ2段長柄復歸選擇
(1A1B接點)

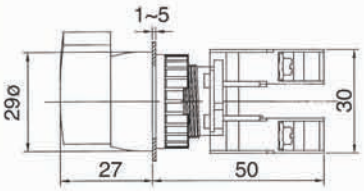

GRS22-1/O , 0←1
GRS22-1/C , 1←0 22φ2段短柄復歸選擇

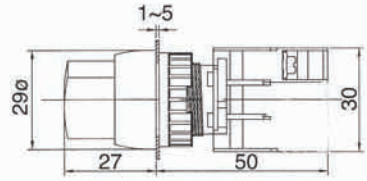

GLRS22-2/O 1→0←2 (左右復歸)
GLRS22A-2/O , 1→0–2 , GLRS22B-2/O , 1–0←2
(左復歸右維持) (左維持右復歸)

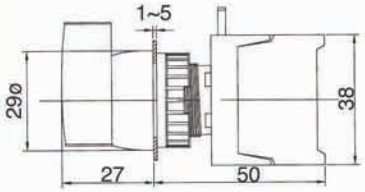

22φ3段長柄復歸選擇

GLS22-1/O , 0–1
GLS22-1/C , 1–0

22φ2段搖柄選擇
(1A或1B接點)



GKS22-2/O , 1–0–2
GKSN22-2/O , 1–0–2

22φ3段三邊可抽鑰匙
22φ3段單抽鑰匙
(2A接點)

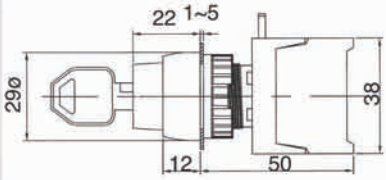

GLS22-1O/C , 1–2
GLS22-2/O ,1–2

22φ2段搖柄選擇
(1A1B或2A接點)



GKSR22-2/O , 1→0←2 22φ3段復歸鑰匙
(左右復歸)

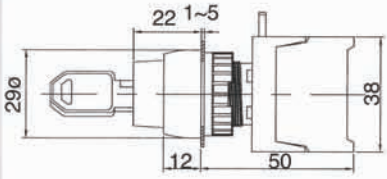

GLUS22-2/O 1→0←2
GLUS22-2/C 1→0←2

22φ3段搖柄復歸選擇



GKSR22A-2/O , 1→0–2 22φ3段復歸鑰匙
(左復歸右維持)

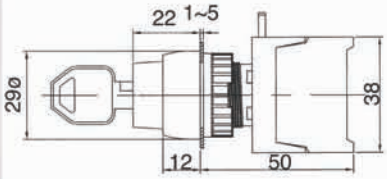

GKS22-1/O , 0–1
GKSN22-1/O , 0–1

22φ2段兩邊可抽鑰匙
22φ2段單抽鑰匙
(1A接點)

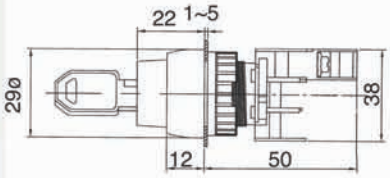

GKSR22B-2/O , 1–0←2 22φ3段復歸鑰匙
(左維持右復歸)

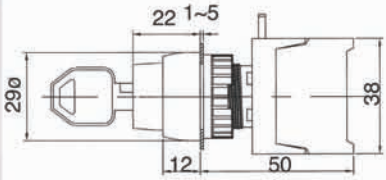

GKS22-1O/C ,1–2
GKSN22-1O/C ,1–2

22φ2段兩邊可抽鑰匙
22φ2段單抽鑰匙
(1A1B接點)

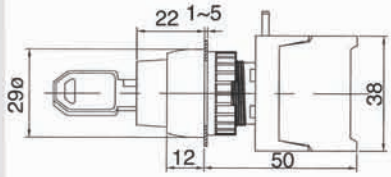

EKS22-1/O
EKS22-1O/C

Emergency stop key switch
22φ 緊急按鈕附鑰匙

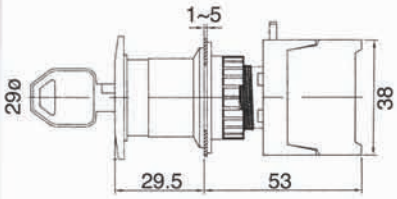

AUSPICIOUS

SL	22	2	2	1	O/C	R	L
Type	Mounting hole	Voltage	Position	No.of contact	Type of contact	Colour	Bulb type
SL,GSL:Knob type LSL,GLSL:Long Knob SRL,GSRL:Knob&spring return LSRL,GLSRL:Long Knob&spring return	22 : 22ø 25 : 25ø 30 : 30ø	1:110V 2:220V 3:380V 4:440V 5:6V 6:12V 7:24V	2:2段 Position 0–1 1–2 3:3段 Position 1–0–2	1 2 3 4	O: N/O(a) C: N/C(b) O/C: N/O+N/C O : 1A接點 C : 1B接點 O/C : 1A1B接點	R: Red G: Green Y: Yellow W: White	L:Led F:Filament bulb N:Neon lamp L:LED燈 F:鎢絲燈 N:氖氣燈

2 Position 2 Position	3 Position	2 Position Spring return	3 Position Spring return	3 Position rreturn one side
2段維持	3段維持	2段右復歸	3段左右復歸	3段左復歸右維持 3段左維持右復歸
0 1 / 1 2 0–1 / 1–2	1 0 2 1–0–2	0 1 / 0←1 1 2 / 1←2	1→ 0←2 1 0 2	1 0 2 / 1→0—2 1 0 2 / 1—0←2

SL22-1/O , N/O , 0–1 SL22-1/C , N/C , 1–0

22φ2段短柄電鍍環照光選擇

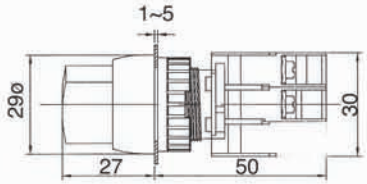

LSL22-1O/C , N/O+N/C , 1–2 (1A1B接點)

22φ2段長柄電鍍環照光選擇

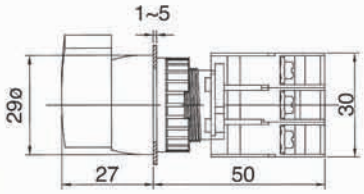

SL22-1O/C , N/O+N/C , 1–2 (1A1B接點)

22φ2段短柄電鍍環照光選擇

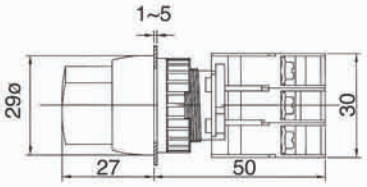

LSL22-2/O , 2N/O , 1–0–2

22φ3段長柄電鍍環照光選擇

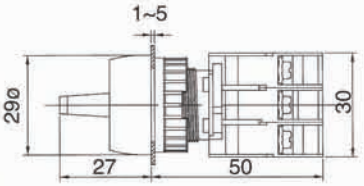

SL22-2/O , 2N/O, 1–0–2

22φ3段短柄電鍍環照光選擇

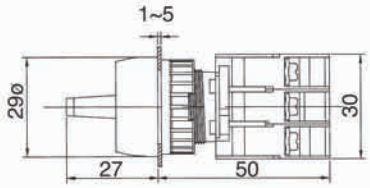

SRL22-1/O , 0←1 SRL22-1/C , 1←0

22φ2段短柄電鍍環照光復歸選擇

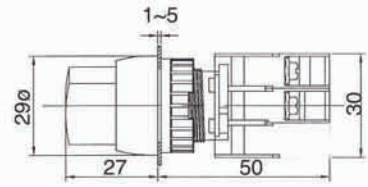

LSL22-1/O , N/O , 0–1 LSL22-1/C , N/C , 1–0

22φ2段長柄電鍍環照光選擇

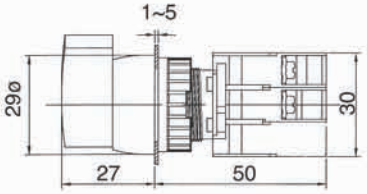

SRL22-1O/C , N/O+N/C , 1←2 (1A1B接點)

22φ2段短柄電鍍環照光復歸選擇

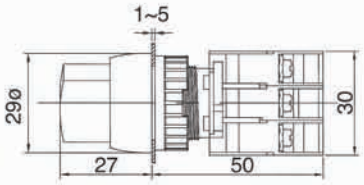

SRL22-2/O , 2N/O 1→0←2（左右復歸）
SRL22A-2/O , 1→0–2 , SRL22B-2/O , 1–0←2
（左復歸右維持）　（左維持右復歸）

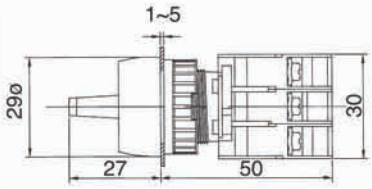

22φ3段短柄電鍍環照光復歸選擇

GLSL-1/O 0–1 , GLSL22-1/C , 1–0
22φ2段長柄照光選擇

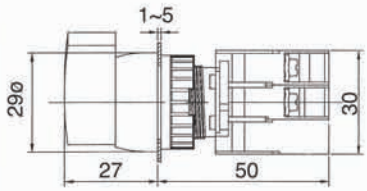

LSRL22-1/O , 0←1 , LSRL22-1O/C , 1←2
LSRL22-2/O , 1→0←2 , LSRL22A-2/O , 1→0–2
LSRL22B-2/O ,1–0←2

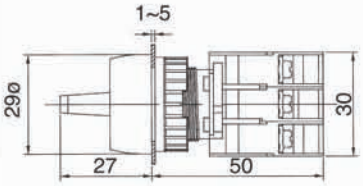

22φ2、3段長柄照光復歸選擇

GLSL22-1O/C N/O+N/C 1–2（1A1B接點）
22φ2段長柄照光選擇

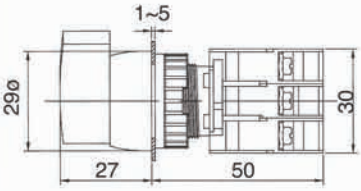

GSL22-1/O 0–1 , N/O
GSL22-1/C 1–0 , N/C
22φ2段短柄照光選擇

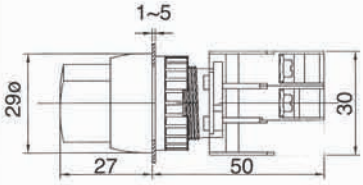

GLSL22-2/O , 2N/O , 1–0–2
22φ3段長柄照光選擇

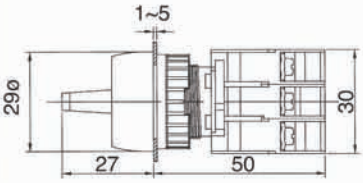

GSL22-1O/C N/O+N/C 1–2（1A1B接點）
22φ2段短柄照光選擇

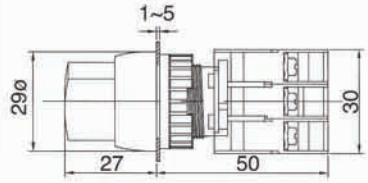

GSL22-2/O , 2N/O , 1–0–2
22φ3段短柄照光選擇

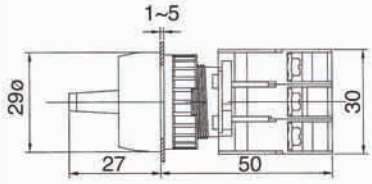

GSRL22-1/O , 0←1 , GSRL22-1/C , 1←0
GSRL22-1O/C , 1←2
22φ2段短柄照光復歸選擇

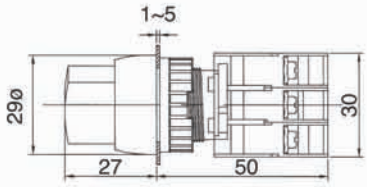

GSRL22-2/O , 2N/O , 1→0←2 (左右復歸)
GSRL22A-2/O , 1→0–2 , GSRL22B , 1–0←2
(左復歸右維持) (左維持右復歸)

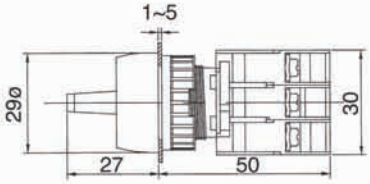

22φ3段短柄照光復歸選擇

GLSRL22-1/O , 0←1
GLSRL22-1O/C , 1←2
22φ2段長柄照光復歸選擇

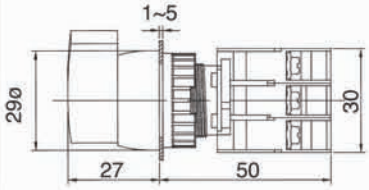

GLSRL22-2/O , 2N/O , 1→0←2 (左右復歸)
GLSRL22A-2/O , 1→0–2 , GLSRL22B-2/O , 1–0←2
(左復歸右維持) (左維持右復歸)

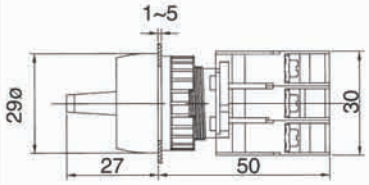

22φ3段長柄照光復歸選擇

LMB 30-1/C 30φ緊急按鈕
(1B接點)

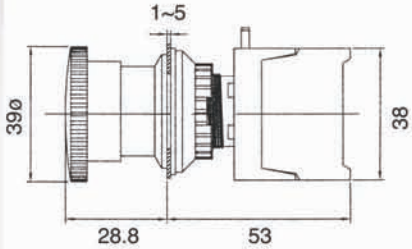

LMB 30-1O/C 30φ緊急按鈕
(1A1B接點)

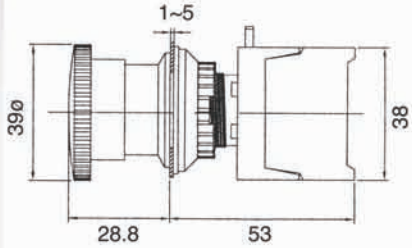

MBL 30-1/C Illuminated latching stop
30φ照光緊急按鈕 (1B接點)

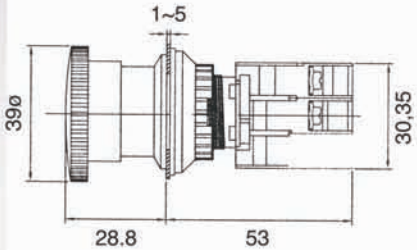

MBL 30-1O/C Illuminated latching stop
30φ照光緊急按鈕 (1A1B接點)

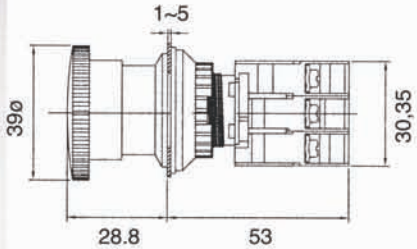

EKS 30-1/C Emergency stop key switch
EKS 30-1O/C 30φ緊急按鈕附鑰匙

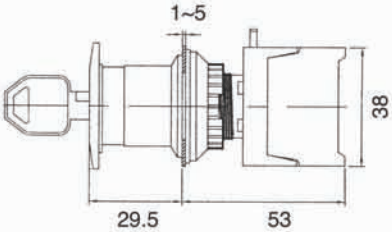

XB30-1/O
XB30-1/C

30φXB型平頭按鈕



XE30-1/C
XE30-1O/C

30φXE型大頭按鈕



XB30-1O/C

30φXB型平頭按鈕
(1A1B接點)



BXE30-1/C
BXE30-1O/C

30φBXE型特大頭按鈕

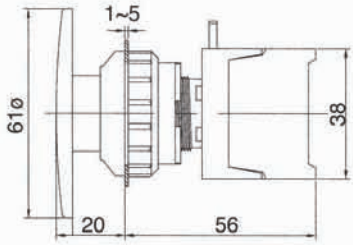

XL30-1/O XL30-1O/C
XL30-1/C

30φXL型凸頭按鈕



XLEB30-1/C Latching STOP

30φXLEB型緊急按鈕



PFL30-1O/C Push ON-Push OFF

30φ維持型平頭按鈕



XLEB30-1O/C Latching STOP (1A1B接點)

30φXLEB型緊急按鈕



EPFL30-1O/C Push ON-Push OFF

30φ維持型大頭按鈕



LXB30-1/O
LXB30-1/C
30φLXB型照光平頭按鈕



LXE30-1/O
LXE30-1/C
30φLXE型照光大頭按鈕



LXB30-1O/C
30φLXB型照光平頭按鈕
(1A1B接點)



LXE30-1O/C
30φLXE型照光大頭按鈕
(1A1B接點)



LXL30-1/O LXL30-1O/C
LXL30-1/C
30φLXL型照光凸頭按鈕



BLXE30-1/O BLXE30-1O/C
BLXE30-1/C
30φBLXE型照光特大頭按鈕

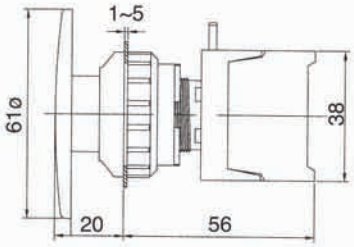

PFL30-1O/C Push ON-Push OFF
30φ維持型照光平頭按鈕



SS30-1/O 0–1
SS30-1/C 1–0
30φSS型2段短柄電鍍環選擇

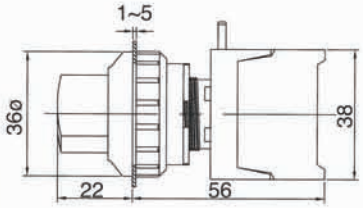

EPFL30-1O/C Push ON-Push OFF
30φ維持型照光大頭按鈕



SS30-1O/C 1–2
30φSS型2段短柄電鍍環選擇
(1A1B接點)

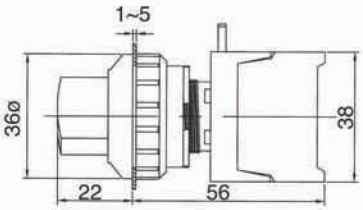

SS30-2/O 1–0–2
30φSS型3段短柄電鍍環選擇

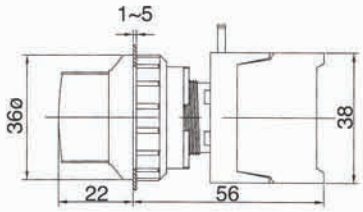

SR30-2/O , 1→0←2 （左右復歸）
SR30A-2/O , 1→0–2 （左復歸右維持）
30φSR型3段短柄電鍍環復歸選擇

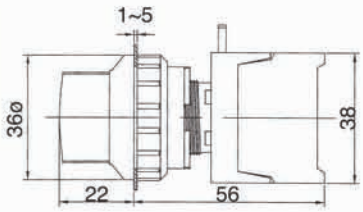

LSS30-1/O , 0–1
LSS30-1/C , 1–0
30φLSS型2段長柄電鍍環選擇

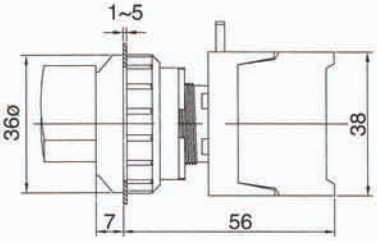

LSR30-1/O , 0←1
LSR30-1/C , 1←0
30φLSR型2段長柄電鍍環復歸選擇

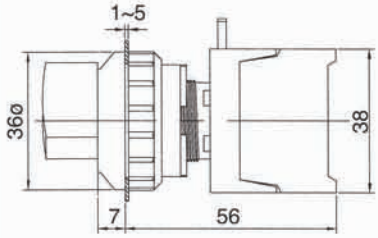

LSS30-1O/C , 1–2 （1A1B接點）
30φLSS型2段長柄電鍍環選擇

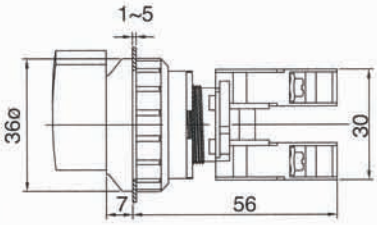

LSR30-1O/C , 1←2 （1A1B接點）
30φLSR型2段長柄電鍍環復歸選擇

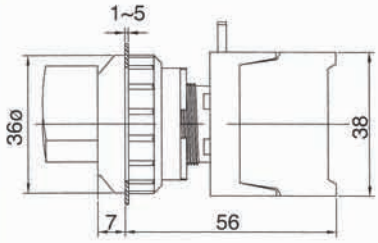

LSS30-2/O , 1–0–2
30φLSS型3段長柄電鍍環選擇

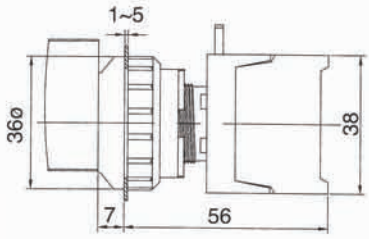

LSR30-2/O , 1→0←2 （左右復歸）
LSR30-2/O , 1→0–2 （左復歸右維持）
30φLSR型3段長柄電鍍環復歸選擇

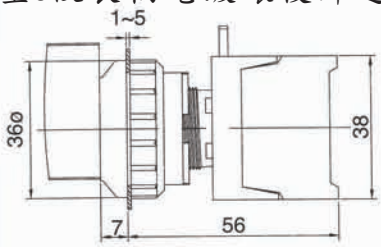

SR30-1/O , 0←1 , SR30-1O/C 1←2
SR30-1/C , 1←0
30φSR型2段短柄電鍍環復歸選擇

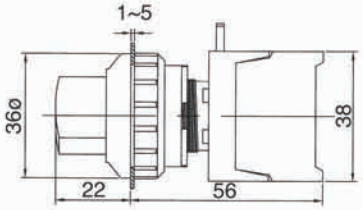

KS30-1/O 0–1
KS30-1/C 1–0
30φ2段電鍍環兩邊可抽鑰匙

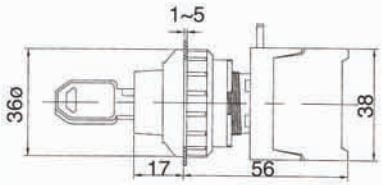

KS30-1O/C , 1–2 30φ2段電鍍環兩邊可抽鑰匙
KSN30-1O/C , 1–2 30φ2段電鍍環單抽鑰匙
(1A1B接點)

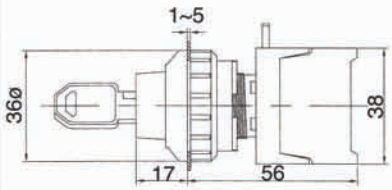

KSR30A-2/O , 1→0–2 (左復歸右維持)
30φ3段電鍍環復歸鑰匙

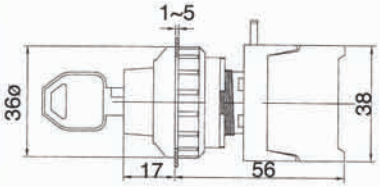

KS30-2/O , 1–0–2 30φ3段電鍍環三邊可抽鑰匙
KSN30-2/O , 1–0–2 30φ3段電鍍環單抽鑰匙

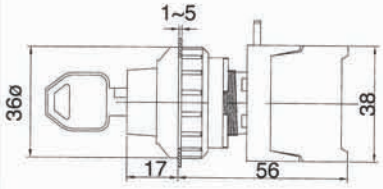

SL30-1/O , 0–1 30φ2段短柄電鍍環照光選擇
SL30-1/C , 1–0

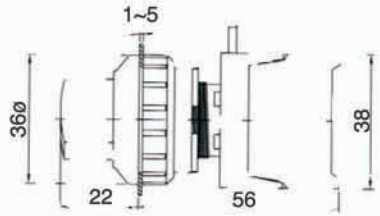

KSR30-1/O , 0←1
KSR30-1/C , 1←0 30φ2段電鍍環復歸鑰匙

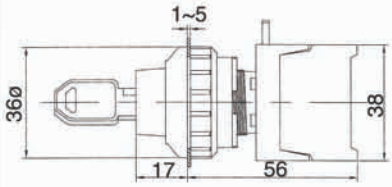

SL30-1O/C , 1–2 (1A1B接點)
30φ2段短柄電鍍環照光選擇

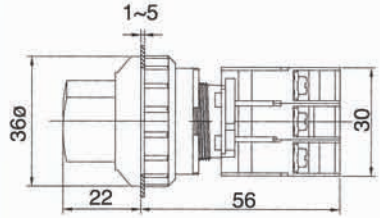

KSR30-1O/C , 1←2 (1A1B接點)
30φ2段電鍍環復歸鑰匙

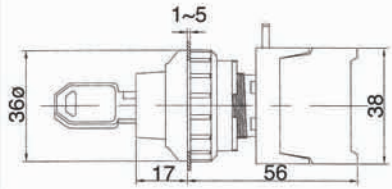

SL30-2/O , 1–0–2
30φ3段短柄電鍍環照光選擇

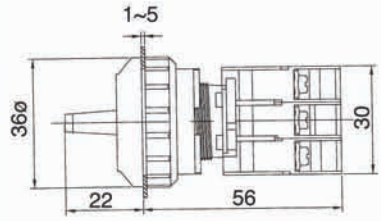

KSR30-2/O , 1→0←2 (左右復歸)
30φ3段電鍍環復歸鑰匙

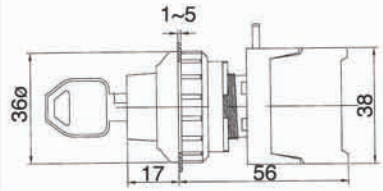

LSL30-1/O , 0–1 30φ2段長柄電鍍環照光選擇
LSL30-1/C , 1–0

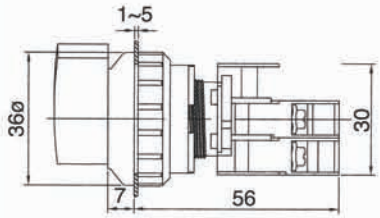

LSL30-1O/C , 1–2（1A1B接點）
30φ2段長柄電鍍環照光選擇

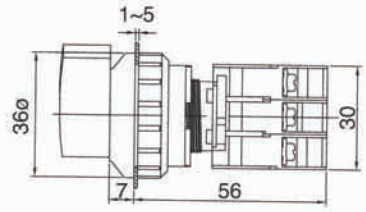

LSRL30-1/O , 0←1
LSRL30-1/C , 1←0
30φ2段長柄電鍍環照光復歸選擇

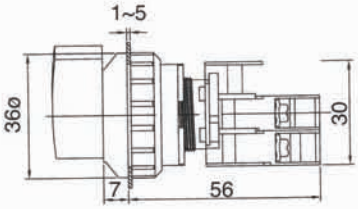

LSL30-2/O , 1–0–2
30φ3段長柄電鍍環照光選擇

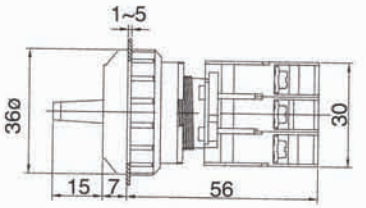

LSRL30-1O/C , 1←2（1A1B接點）
30φ2段長柄電鍍環照光復歸選擇

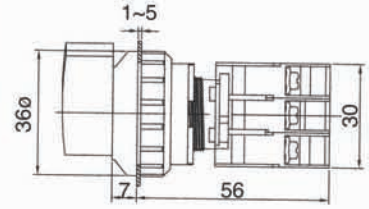

SRL30-1/O , 0←1
SRL30-1/C , 1←0
30φ2段短柄電鍍環照光復歸選擇

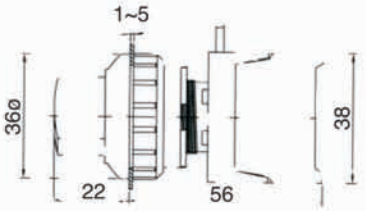

LSRL30-2/O , 1→0←2 （左右復歸）
LSRL30A-2/O , 1→0–2 （左復歸右維持）

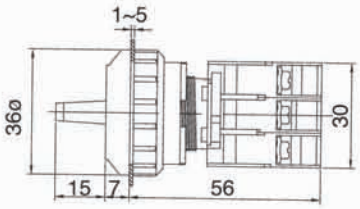

30φ3段長柄電鍍環照光復歸選擇

SRL30-1O/C , 1←2（1A1B接點）
30φ2段短柄電鍍環照光復歸選擇

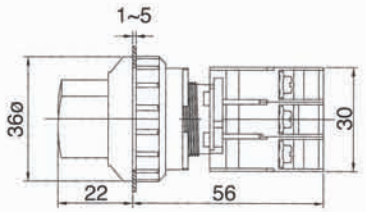

LS30-1/O , 0–1 , LS30-1O/C , 1–2
LS30-2/O , 0–1 30φ2段搖柄電鍍環選擇

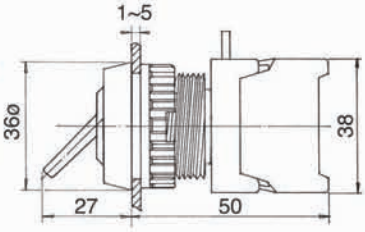

SRL30-2/O , 1→0←2 （左右復歸）
SRL30A-2/O , 1→0–2 （左復歸右維持）

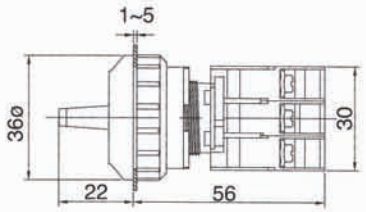

30φ3段短柄電鍍環照光復歸選擇

LUS30-2/O , 1→0←2
LUS30-2/C , 1→0←2
30φ3段搖柄電鍍環復歸選擇

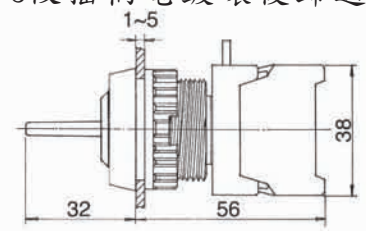

PBF30-1/O
PBF30-1/C 30φPBF型電鍍環平頭按鈕



LEB30-1/C 30φLEB型電鍍環緊急按鈕

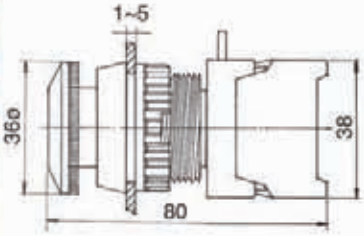

PBF30-1O/C 30φPBF型電鍍環平頭按鈕
(1A1B接點)



LEB30-1O/C 30φLEB型電鍍環緊急按鈕
(1A1B接點)

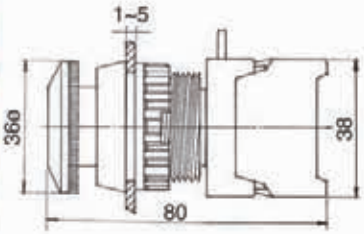

PBL30-1/O PBL30-1O/C
PBL30-1/C 30φPBL型電鍍環凸頭按鈕



LBF30-1/O
LBF30-1/C 30φLBF型電鍍環照光平頭按鈕



EB30-1/C
EB30-1O/C 30φEB型電鍍環大頭按鈕

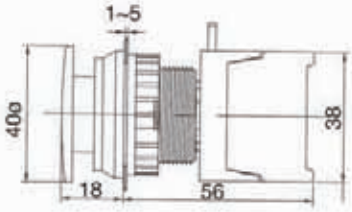

LBF30-1O/C (1A1B接點)
30φLBF型電鍍環照光平頭按鈕



BEB30-1/C
BEB30-1O/C 30φBEB型電鍍環特大頭按鈕

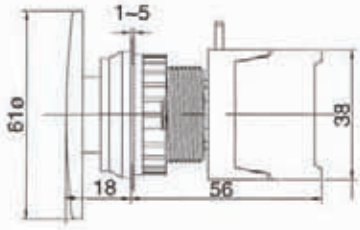

LBL30-1/O , LBL30-1O/C
LBL30-1/C 30φLBL型電鍍環照光凸頭按鈕



EBL30-1/C
30φEBL型電鍍環照光大頭按鈕

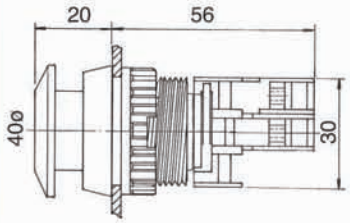

LCS30-2/O , 1–0–2
30φLCS型3段長柄電鍍環選擇

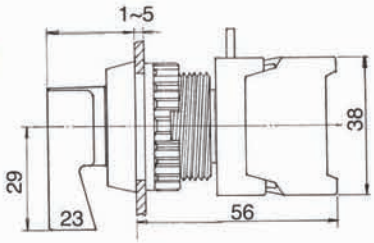

EBL30-1O/C (1A1B接點)
30φEBL型電鍍環照光大頭按鈕

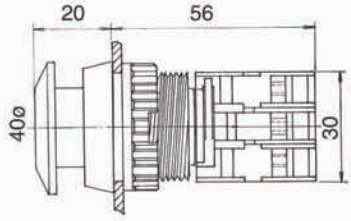

RS30-1/O , 0←1 , RS30-1O/C, 1←2
RS30-1/C , 1←0
30φRS型2段短柄電鍍環復歸選擇

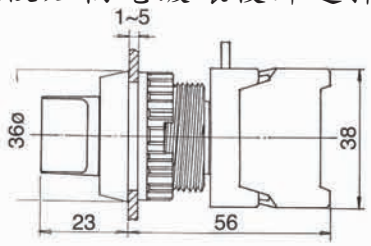

CS30-1/O , 0–1 , CS30-1O/C , 1–2
CS30-1/C , 1–0
30φCS型2段短柄電鍍環選擇

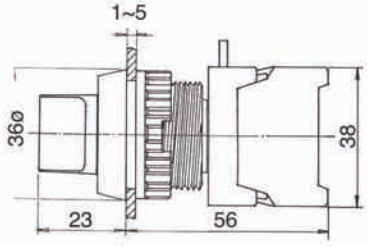

LRS30-1/O , 0←1 , LRS30-1O/C , 1←2
LRS30-1/C , 1←0
30φLRS型2段長柄電鍍環復歸選擇



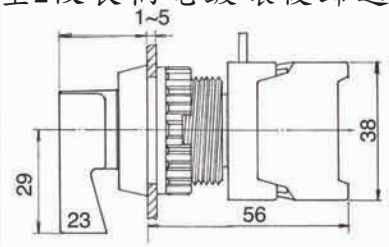

CS30-2/O , 1–0–2
30φCS型3段短柄電鍍環選擇

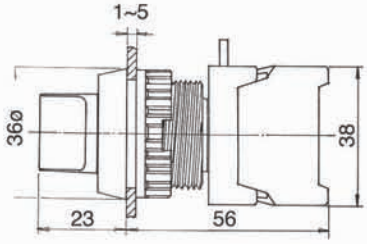

LRS30-2/O , 1→0←2 (左右復歸)
30φLRS型3段長柄電鍍環復歸選擇

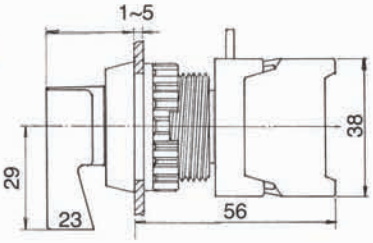

LCS30-1/O , 0–1 , LCS30-1O/C , 1–2
LCS30-1/C , 1–0
30φLCS型2段長柄電鍍環選擇

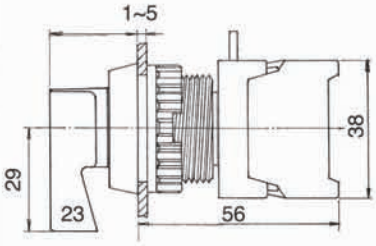

BEBL30-1/C
BEBL30-1O/C
30φBEBL型電鍍環照光特大頭按鈕

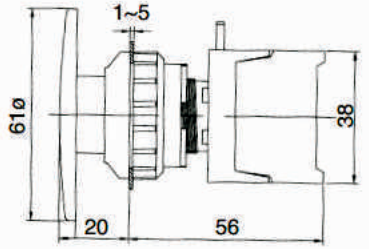

DOUBLE PUSH BUTTON 22ø,25ø,30ø
ILLUMINATED DOUBLE PUSH BUTTON

AUSPICIOUS

DPB-22N	22	1	1O/C
Illuminated type	Mounting hole	Voltage	Type of contact
DPB-22N DPB-25N DPB-30N	22 : 22ø 25 : 25ø 30 : 30ø	1:110V 2:220V 3:380V 4:440V 5:6V 6:12V 7:24V	O: N/O(a) C: N/C(b) O/C: N/O+N/C 1a+1b O : 1A接點 C : 1B接點 O/C : 1A1B接點
Push button			
DPB-22 DPB-25 DPB-30			
DPB	22		1O/C

WATER PROOF COVER

DPB-22 22φ 雙頭按鈕
DPB-25 25φ 雙頭按鈕



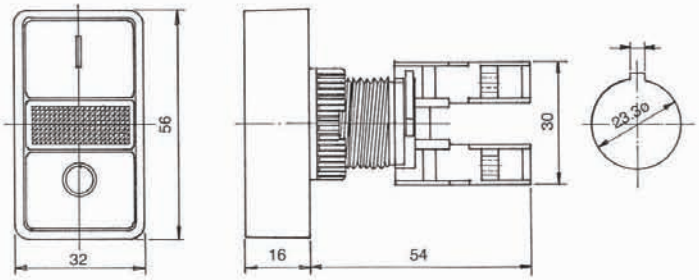

DPB-22N , Illuminated 22φ 照光雙頭按鈕
DPB-25N 25φ 照光雙頭按鈕

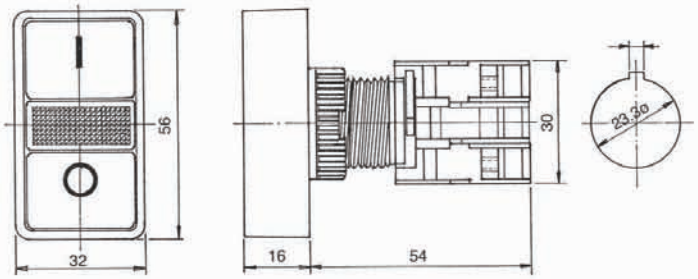

DPB-30N 30φ 雙頭按鈕

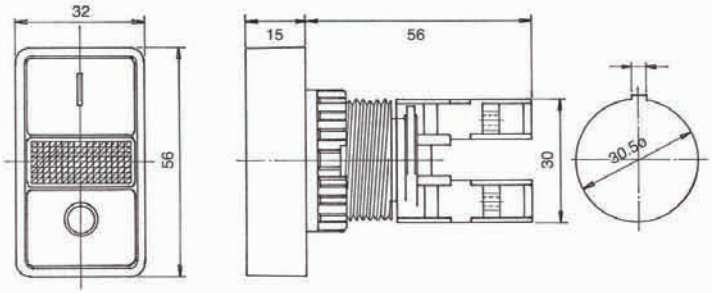

DPB-30N , Illuminated 30φ 照光雙頭按鈕

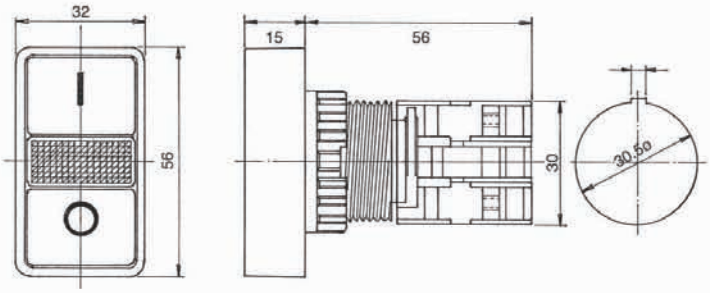

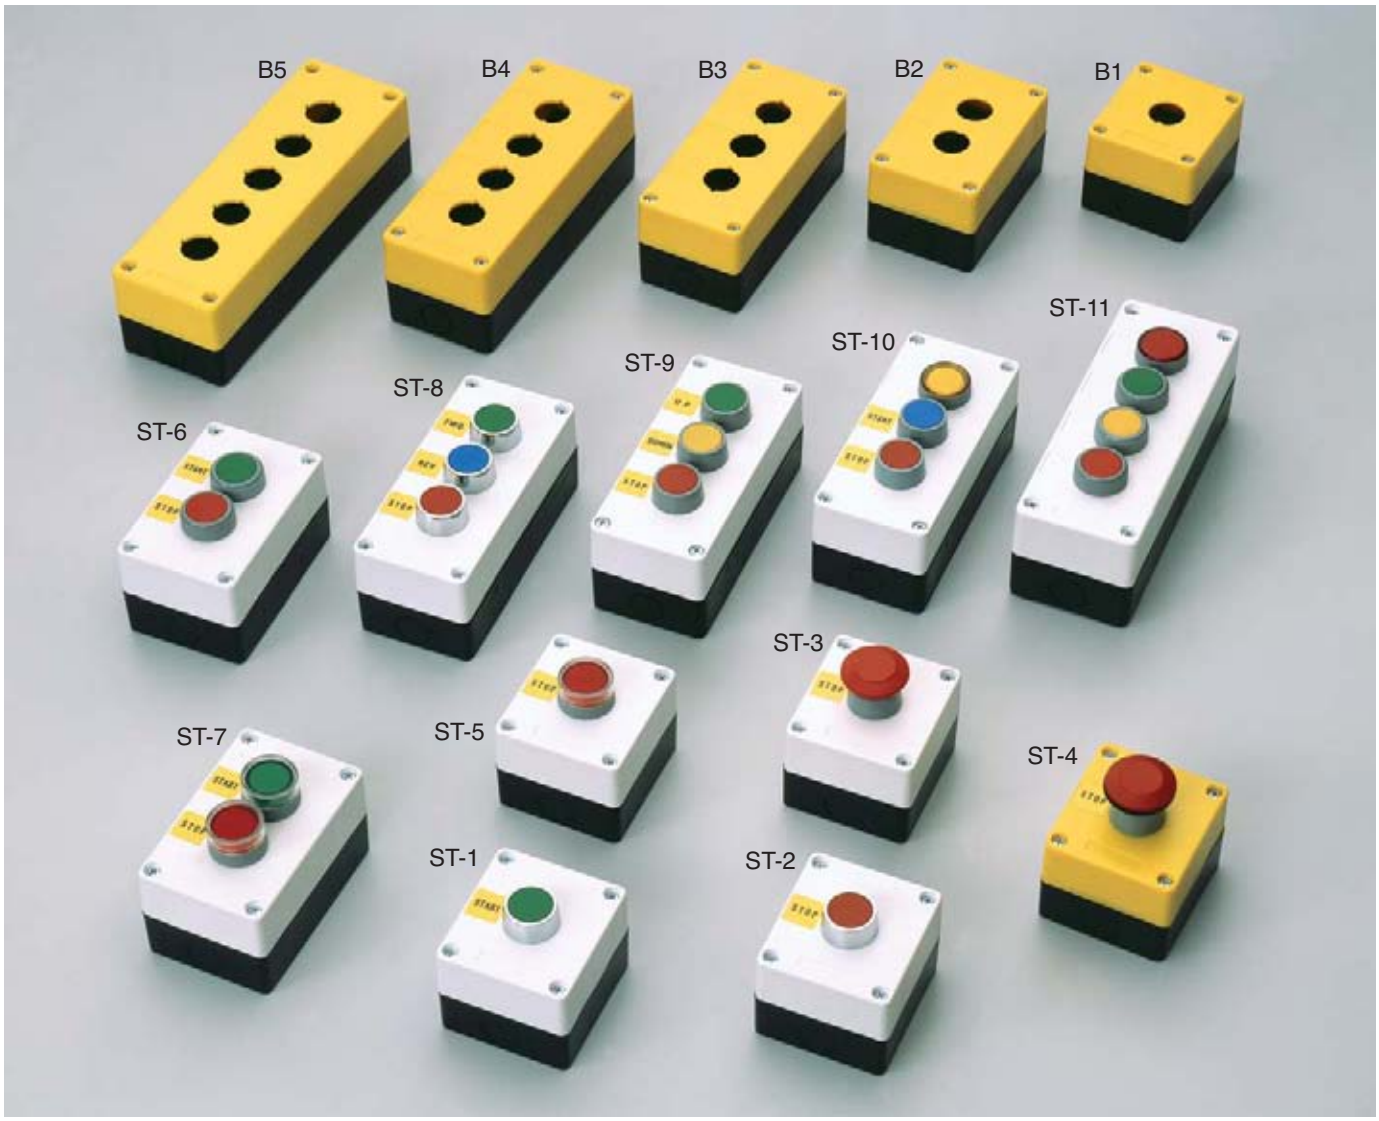

ST-1	1 pushbutton "START"	
ST-2	1 pushbutton "STOP"	
ST-3	1mushroom Head pushbutton.	
ST-4	1 Latching mushroom head pushbutton"STOP"	
ST-5	1 illuminated push button with neon lamp "STOP"	
ST-6	2 pushbutton "START "STOP"	

ST-7	2 illuminated pushbutton with neon lamp "START" "STOP"	
ST-8	3 pushbuttons "FORWARD" "REVERSE" "STOP"	
ST-9	3 pushbuttons "UP" "DOWN" "STOP"	
ST-10	1 red pilot light with neon lamp 2 pushbuttons "START" "STOP"	
ST-11	3 illuminated push button with neon lamp	



	A	B
1 Button	78	67
2 Button	111	89
3 Button	151	130
4 Button	185	150
5 Button	222	184

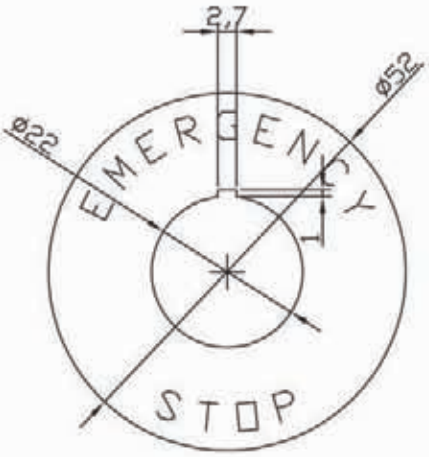

22φ 緊急按鈕標籤

LEGEND PLATE FRAME

LEGEND PLATE SIZE

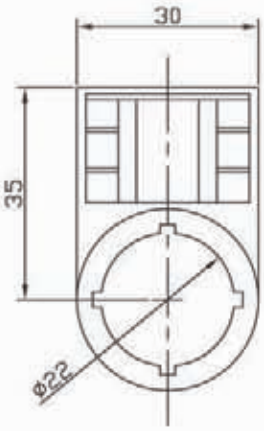

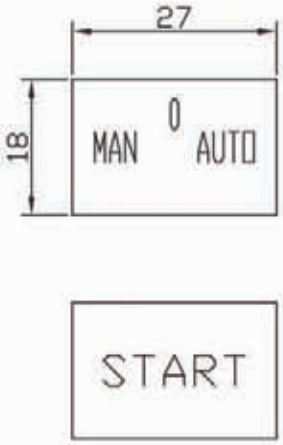

22φ 開關標示銘牌

LEGEND PLATES