

特點

- 零背隙
- 剛性大
- 材質：鋁合金
- 適合譯碼器、小馬力傳動機構、高精密傳動上
- 固定方式：夾緊式
- 一體成型
- 偏角誤差較佳
- 不銹鋼材質扭力較佳

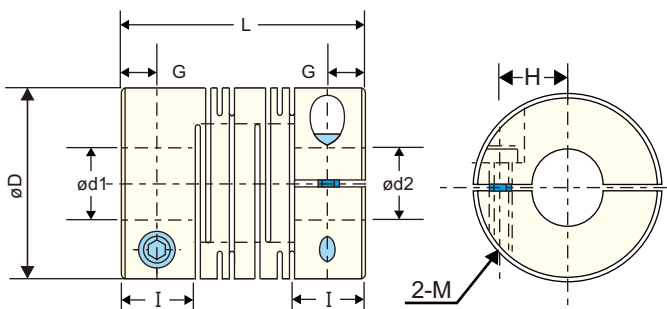
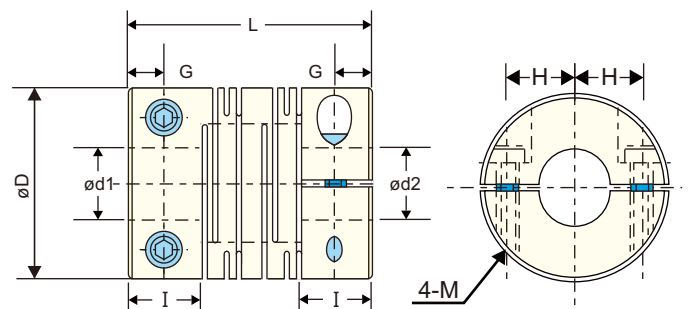


規格

型號	一般扭力 (N.m)	最大扭力 (N.m)	最高回轉速 (Rpm/min)	慣性 (Kg·m ²)	容許偏心 (mm)	容許偏角 (°)	容許軸向位差 (mm)
SCT-12C	0.2	0.4	12000	7.8×10^{-8}	0.10	2	±0.3
SCT-16C	0.3	0.6	9500	3.4×10^{-7}	0.10	2	±0.4
SCT-20C	0.5	1.0	7600	9.1×10^{-7}	0.10	2	±0.4
SCT-25C	1.0	2.0	6100	2.6×10^{-6}	0.15	2	±0.5
SCT-32C	2.0	4.0	4800	9.7×10^{-6}	0.15	2	±0.5
SCT-40C	5.0	10.0	3800	3.3×10^{-5}	0.20	2	±0.5
SCT-50C	10.0	20.0	3100	1.0×10^{-4}	0.20	2	±0.5
SCT-63C	20.0	40.0	2400	3.2×10^{-4}	0.20	2	±0.5

尺寸

型號	D	I	L	G	H	M	d1xd2標準孔徑公差(H7)		重量(g)
							Min	Max	
SCT-12C	12	5.0	18.5	2.5	4.0	M2	3	5	3.6
SCT-16C	16	6.5	23.0	3.25	5.0	M2.5	4	6	9.2
SCT-20C	20	7.5	26.0	3.75	6.5	M3	4	8	16.0
SCT-25C	25	8.5	31.0	4.25	9.0	M3	5	10	28.0
SCT-32C	32	12.0	41.0	6.0	11.0	M4	6	14	64.0
SCT-40C	40	15.0	56.0	8.5	14.0	M5	8	16	140.0
SCT-50C	50	18.0	71.0	10.5	18.0	M6	12	22	270.0
SCT-63C	63	22.0	90.0	13.0	24.0	M8	14	35	530.0

訂購型號：SCT - ϕ DC - ϕ d1 × ϕ d2外徑 $\phi 16 \sim \phi 32$ 外徑 $\phi 40 \sim \phi 63$