

特點


- LSU-BA,LSU-BX, LSU-BAX型傳感器的秤量從3kg到50kg
- 全鋁合金結構，密封緊密，可適用於多種的秤重設備



規格

Type	型 號	LSU-BA-3	LSU-BA-6	LSU-BA-12	LSU-BA-20	LSU-BX-30	LSU-BX-50
Maximum capacity	額定載荷	3KG	6KG	12KG	20KG	30KG	50KG
Material	彈性體材質	Aluminum					
Recommended excitation	推薦激勵電壓	10V					
Maximum Excitation	最大激勵電壓	15V					
Rated output (=R0)	輸出靈敏度	2 ± 0.05 mV/V					
Zero balance	零點範圍	± 0.030%R0					
Creep error (20 minutes)	蠕變(20 min)	± 0.025%R0					
Repeatability	重 復 性	± 0.02%R0					
Repeatability	輸入阻抗	394 ± 3Ω					
Output resistance	輸出阻抗	350 ± 3Ω					
Compensated temperature range	溫度補償範圍	-10 ~ 40°C					
Operating temperature range	允許使用溫度範圍	-20 ~ 60°C					
Temperature effect on output	溫度對輸出靈敏度的影響	0.02%Load/10°C					
Temperature effect on zero	溫度對零點輸出的影響	0.02%R0/10°C					
Safe load limit	安全過載範圍	150%of rat. cap.					
Ultimate load	極限過載範圍	200%of rat. cap.					
Sealing	密 封	Potted					
Protection class	防護等級	IP 66					
Maximum platform size	最大秤盤尺寸	380 X 380 mm					

尺寸

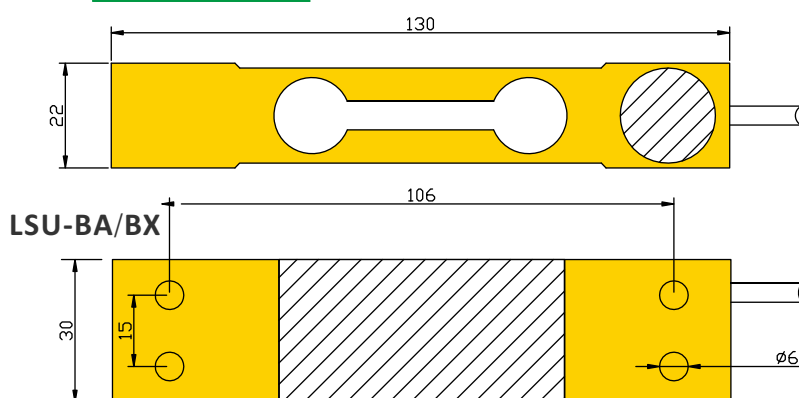

接線圖

