



規格/尺寸

BRTY53TZ-1M/2M

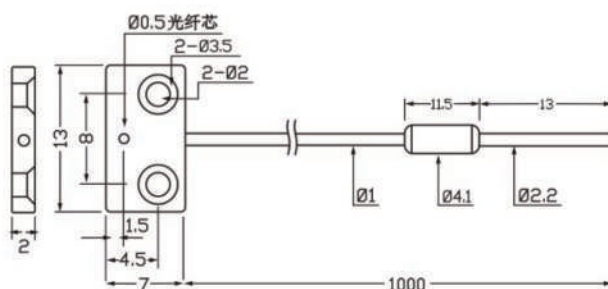


光纖外径=Ø1.0
光纖内径=Ø0.5
弯曲半径: R15
检测距离=80mm
工作温度: -50°C~+70°C

BTY54TZ-1M/2M

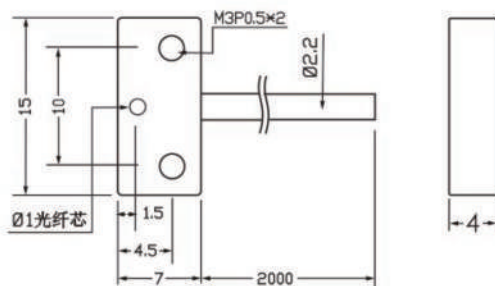


光纖外径=Ø2.2
光纖内径=Ø1.0
弯曲半径: R25
检测距离=300mm
工作温度: -50°C~+70°C

BTY57TZ-1M/2M

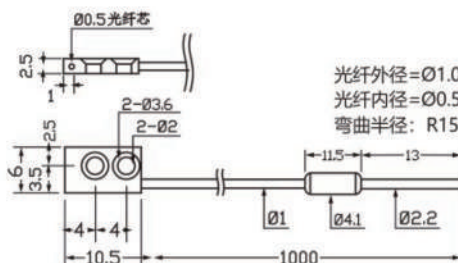

光纖外径=Ø1.0
光纖内径=Ø0.5
弯曲半径: R15
检测距离=80mm
工作温度: -50°C~+70°C

BT-Z8-1M/2M

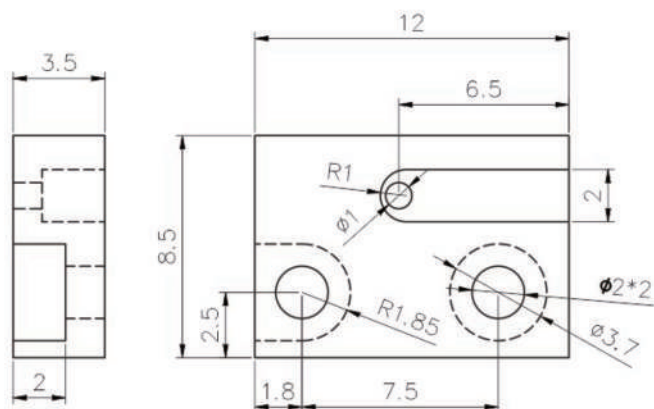

光纖外径=Ø2.2
光纖内径=Ø1.0
弯曲半径: R2
检测距离=300mm
工作温度: -50°C~+70°C