
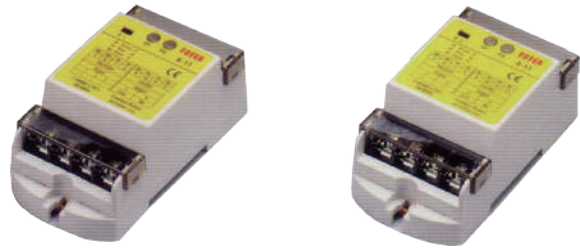


- 「Push-in」 fixed method
- Immune to sunlight
- Dark ON/ light ON changeable
- Off delay time : 0.5 sec

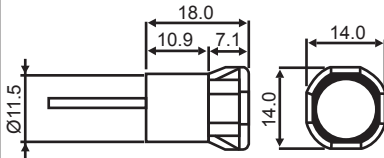

Specification 規格

Product	產品	Amplifier / 放大器		Sensor head / 光電頭
Model	型號	A-11-110V	A-11-220V	SC-6M
Power supply	工作電壓	110VAC 50/60Hz	220VAC 50/60Hz	
Current consumption	耗電流	3VA Max.		
Response time	反應時間	5 ms max.		
Min.sensible object	最小檢測物	10.0Φ Opaque object		
Control output	控制輸出	1a / Relay(3A/250VAC)		
Output status	輸出狀態	NO/NC changeable		
Off delay	復歸延遲	0.5s		
Housing material	外殼材質	Intensive ABS		PMMA
Sensing distance	檢測距離			6.0M max.
Fixed hole	安裝孔徑			12.5Φ±0.2
Connection method	出線方式	Terminals		4Φ x 10m
Operating circumstance	工作環境	-25℃~+80℃ ; 35%~85% RH		

Connection diagram 接線圖

Bk2	Bk1	Br	Bl	Bl2	Br2	Bl1	Br1
5	6	7	8	9	10	11	12
Receiver/接收器				Emitter/發射器			
A-11							
「Power/電源」				Ourput/輸出			
1		2		3		4	
~		~		Com		NO	

「Br」: Brown wire/棕線 「Bl」: Blue wire/青線
「Bk」: Black wire/黑線

Outline dimension 外型尺寸

