



規格/尺寸

TYPE M6 型號(Model) BR-620

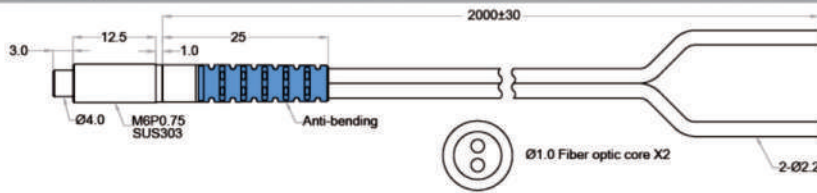


光纖類型(Fiber Type)	標準型(Standard)
光纖線長度(Fiber Length)	2M
最大彎曲半徑 (Minimum bending radius)	R25
光纖線徑 (Fiber diameter)	外徑(OD) Ψ 2.2 內徑(I D) Ψ 1.0
環境溫度 (Operate temperature)	-55°C~+70°C

TYPE M6 型號(Model) BR-620-T10(T20/T40/T90)

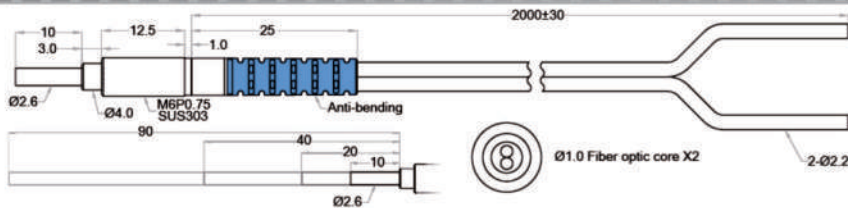


光纖類型(Fiber Type)	細長管型(Slender tube)
光纖線長度(Fiber Length)	2M
最大彎曲半徑 (Minimum bending radius)	R25
光纖線徑 (Fiber diameter)	外徑(OD) Ψ 2.2 內徑(I D) Ψ 1.0
環境溫度 (Operate temperature)	-55°C~+70°C

TYPE M4 型號 (Model) BRC-420

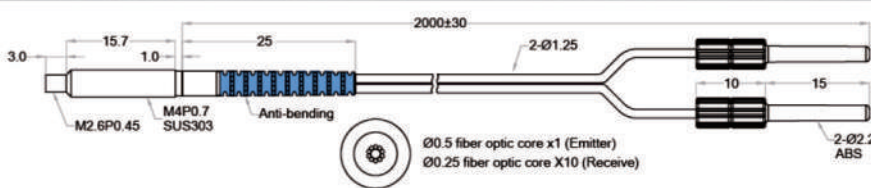


光纖類型(Fiber Type)	同軸型(Coaxial)
光纖線長度(Fiber Length)	2M
最大彎曲半徑 (Minimum bending radius)	R15
光纖線徑 (Fiber diameter)	外徑(OD) Ψ 1.25 內徑(I D) Ψ 0.5*1/ Ψ 0.25*10
環境溫度 (Operate temperature)	-55°C~+70°C

TYPE M4 型號 (Model) BRC-420-T10(T20/T40/T90)

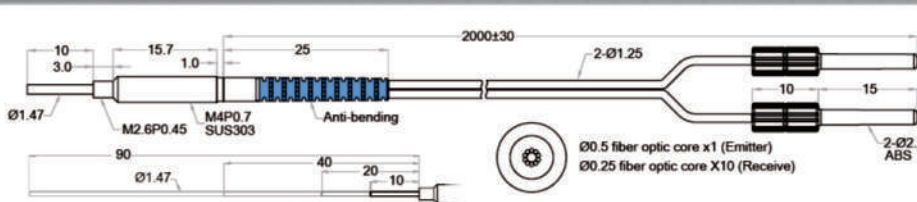


光纖類型(Fiber Type)	細長管型(Slender tube)
光纖線長度(Fiber Length)	2M
最大彎曲半徑 (Minimum bending radius)	R15
光纖線徑 (Fiber diameter)	外徑(OD) Ψ 1.25 內徑(I D) Ψ 0.5*1/ Ψ 0.25*10
環境溫度 (Operate temperature)	-55°C~+70°C

TYPE M4 型號(Model) BRS-420

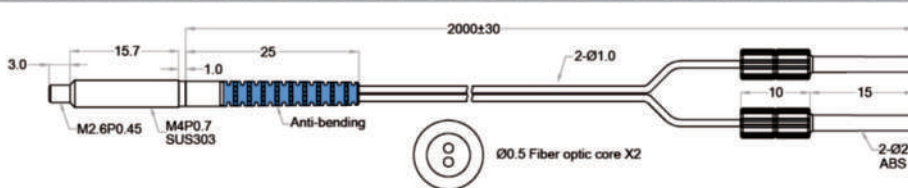






光纖類型(Fiber Type)	精確型(Precision)
光纖線長度(Fiber Length)	2M
最大彎曲半徑 (Minimum bending radius)	R15
光纖線徑 (Fiber diameter)	外徑(OD) Ψ 1.0 內徑(I D) Ψ 0.5
環境溫度 (Operate temperature)	-55°C~+70°C

TYPE M4 型號(Model) BRS-420-T10(T20/T40/T90)

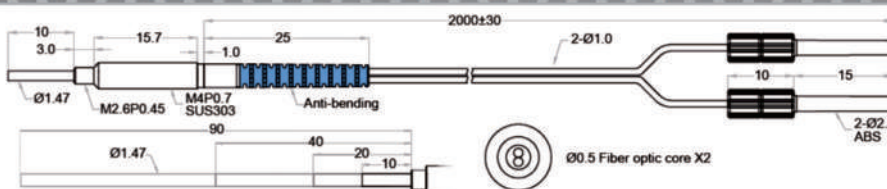

光纖類型(Fiber Type)	細長管型(Slender tube)
光纖線長度(Fiber Length)	2M
最大彎曲半徑 (Minimum bending radius)	R15
光纖線徑 (Fiber diameter)	外徑(OD) Ψ 1.0 內徑(I D) Ψ 0.5
環境溫度 (Operate temperature)	-55°C~+70°C

規格/尺寸

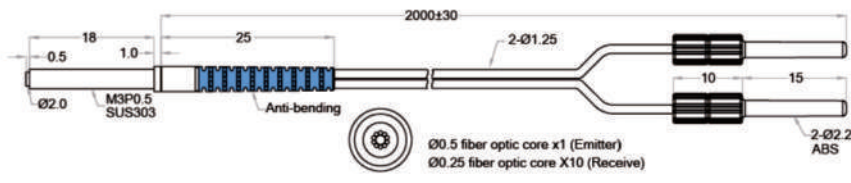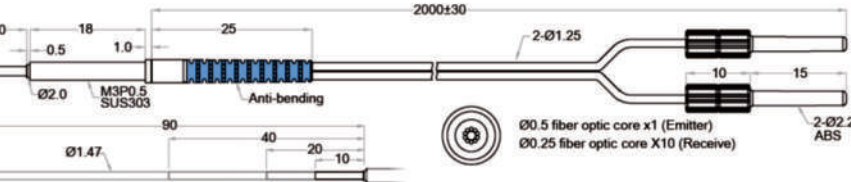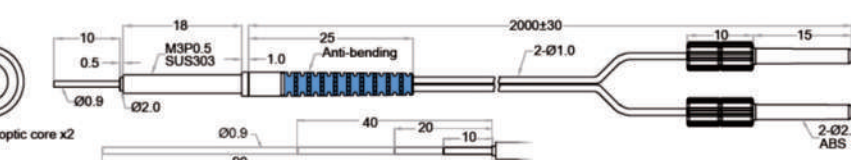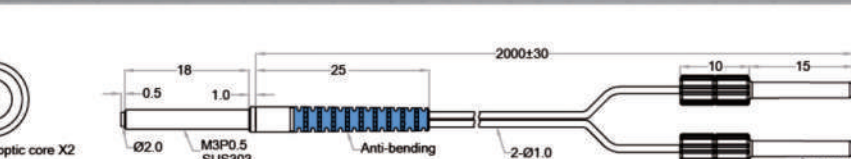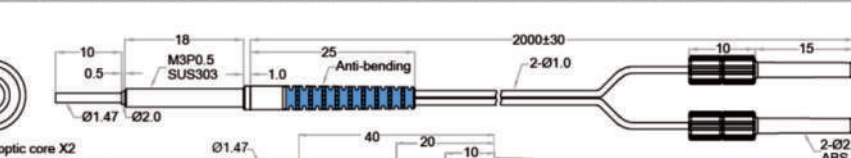TYPE M3 型號(Model) BRC-320  Ø2.0 M3P0.5 SUS303 Anti-bending 2000±30 2-Ø1.25 Ø0.5 fiber optic core x1 (Emitter) Ø0.25 fiber optic core X10 (Receive) 2-Ø2.2 ABS	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>同軸型(Coaxial)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R15</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) $\Psi 1.25$ 內徑(ID) $\Psi 0.5 \times 1 / \Psi 0.25 \times 10$</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-55°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	同軸型(Coaxial)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R15	光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.25$ 內徑(ID) $\Psi 0.5 \times 1 / \Psi 0.25 \times 10$	環境溫度 (Operate temperature)	-55°C~+70°C
光纖類型(Fiber Type)	同軸型(Coaxial)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R15										
光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.25$ 內徑(ID) $\Psi 0.5 \times 1 / \Psi 0.25 \times 10$										
環境溫度 (Operate temperature)	-55°C~+70°C										
TYPE M3 型號(Model) BRC-320-T10(T20/T40/T90)  Ø2.0 M3P0.5 SUS303 Anti-bending 2000±30 2-Ø1.25 Ø0.5 fiber optic core x1 (Emitter) Ø0.25 fiber optic core X10 (Receive) 2-Ø2.2 ABS	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>細長管型(Slender tube)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R15</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) $\Psi 1.25$ 內徑(ID) $\Psi 0.5 \times 1 / \Psi 0.25 \times 10$</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-55°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	細長管型(Slender tube)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R15	光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.25$ 內徑(ID) $\Psi 0.5 \times 1 / \Psi 0.25 \times 10$	環境溫度 (Operate temperature)	-55°C~+70°C
光纖類型(Fiber Type)	細長管型(Slender tube)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R15										
光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.25$ 內徑(ID) $\Psi 0.5 \times 1 / \Psi 0.25 \times 10$										
環境溫度 (Operate temperature)	-55°C~+70°C										
TYPE M3 型號(Model) BRE-320-T10(T20/T40/T90)  Ø2.0 M3P0.5 SUS303 Anti-bending 2000±30 2-Ø1.0 Ø0.9 fiber optic core x2 2-Ø2.2 ABS	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>細長管型(Slender tube)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R10</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.25$</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-55°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	細長管型(Slender tube)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R10	光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.25$	環境溫度 (Operate temperature)	-55°C~+70°C
光纖類型(Fiber Type)	細長管型(Slender tube)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R10										
光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.25$										
環境溫度 (Operate temperature)	-55°C~+70°C										
TYPE M3 型號(Model) BRS-320  Ø2.0 M3P0.5 SUS303 Anti-bending 2000±30 2-Ø1.0 Ø0.5 Fiber optic core X2 2-Ø2.2 ABS	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>精確型(Precision)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R15</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.5$</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-55°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	精確型(Precision)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R15	光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.5$	環境溫度 (Operate temperature)	-55°C~+70°C
光纖類型(Fiber Type)	精確型(Precision)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R15										
光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.5$										
環境溫度 (Operate temperature)	-55°C~+70°C										
TYPE M3 型號(Model) BRS-320-T10(T20/T40/T90)  Ø2.0 M3P0.5 SUS303 Anti-bending 2000±30 2-Ø1.0 Ø0.5 Fiber optic core X2 2-Ø2.2 ABS	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>細長管型(Slender tube)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R15</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.5$</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-55°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	細長管型(Slender tube)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R15	光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.5$	環境溫度 (Operate temperature)	-55°C~+70°C
光纖類型(Fiber Type)	細長管型(Slender tube)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R15										
光纖線徑 (Fiber diameter)	外徑(OD) $\Psi 1.0$ 內徑(ID) $\Psi 0.5$										
環境溫度 (Operate temperature)	-55°C~+70°C										

規格/尺寸

TYPE M4 型號(Model) RW-420-X90 <i>Free Cut</i> Side view fiber	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>耐彎曲型(Flexible)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R1</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) Ø1.0 內徑(I D) Ø0.5</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-40°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	耐彎曲型(Flexible)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R1	光纖線徑 (Fiber diameter)	外徑(OD) Ø1.0 內徑(I D) Ø0.5	環境溫度 (Operate temperature)	-40°C~+70°C
光纖類型(Fiber Type)	耐彎曲型(Flexible)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R1										
光纖線徑 (Fiber diameter)	外徑(OD) Ø1.0 內徑(I D) Ø0.5										
環境溫度 (Operate temperature)	-40°C~+70°C										
TYPE M4 型號(Model) RD1-420-X90 <i>Free Cut</i> Side view fiber	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>耐彎曲型(Flexible)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R5</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) Ø1.25 內徑(I D) Ø0.5</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-55°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	耐彎曲型(Flexible)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R5	光纖線徑 (Fiber diameter)	外徑(OD) Ø1.25 內徑(I D) Ø0.5	環境溫度 (Operate temperature)	-55°C~+70°C
光纖類型(Fiber Type)	耐彎曲型(Flexible)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R5										
光纖線徑 (Fiber diameter)	外徑(OD) Ø1.25 內徑(I D) Ø0.5										
環境溫度 (Operate temperature)	-55°C~+70°C										
TYPE M3 型號(Model) RC-320-X90 <i>Free Cut</i> Side view fiber	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>同軸型(Coaxial)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R15</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) Ø1.25 內徑(I D) Ø0.5x1/Ø0.25x10</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-55°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	同軸型(Coaxial)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R15	光纖線徑 (Fiber diameter)	外徑(OD) Ø1.25 內徑(I D) Ø0.5x1/Ø0.25x10	環境溫度 (Operate temperature)	-55°C~+70°C
光纖類型(Fiber Type)	同軸型(Coaxial)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R15										
光纖線徑 (Fiber diameter)	外徑(OD) Ø1.25 內徑(I D) Ø0.5x1/Ø0.25x10										
環境溫度 (Operate temperature)	-55°C~+70°C										
TYPE 型號(Model) R-1020-LZ <i>Free Cut</i> Side view fiber	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>陣列型(Multiple core)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R15</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) Ø1.25 內徑(I D) Ø(Ø0.25x9)*2</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-55°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	陣列型(Multiple core)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R15	光纖線徑 (Fiber diameter)	外徑(OD) Ø1.25 內徑(I D) Ø(Ø0.25x9)*2	環境溫度 (Operate temperature)	-55°C~+70°C
光纖類型(Fiber Type)	陣列型(Multiple core)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R15										
光纖線徑 (Fiber diameter)	外徑(OD) Ø1.25 內徑(I D) Ø(Ø0.25x9)*2										
環境溫度 (Operate temperature)	-55°C~+70°C										
TYPE 型號(Model) RW-4720-N <i>Free Cut</i> Side view fiber	<table border="1"> <tr> <td>光纖類型(Fiber Type)</td><td>耐彎曲型(Flexible)</td></tr> <tr> <td>光纖線長度(Fiber Length)</td><td>2M</td></tr> <tr> <td>最大彎曲半徑 (Minimum bending radius)</td><td>R1</td></tr> <tr> <td>光纖線徑 (Fiber diameter)</td><td>外徑(OD) Ø1.0 內徑(I D) Ø0.5</td></tr> <tr> <td>環境溫度 (Operate temperature)</td><td>-40°C~+70°C</td></tr> </table>	光纖類型(Fiber Type)	耐彎曲型(Flexible)	光纖線長度(Fiber Length)	2M	最大彎曲半徑 (Minimum bending radius)	R1	光纖線徑 (Fiber diameter)	外徑(OD) Ø1.0 內徑(I D) Ø0.5	環境溫度 (Operate temperature)	-40°C~+70°C
光纖類型(Fiber Type)	耐彎曲型(Flexible)										
光纖線長度(Fiber Length)	2M										
最大彎曲半徑 (Minimum bending radius)	R1										
光纖線徑 (Fiber diameter)	外徑(OD) Ø1.0 內徑(I D) Ø0.5										
環境溫度 (Operate temperature)	-40°C~+70°C										