



規格/尺寸


BR10Q-1M/2M

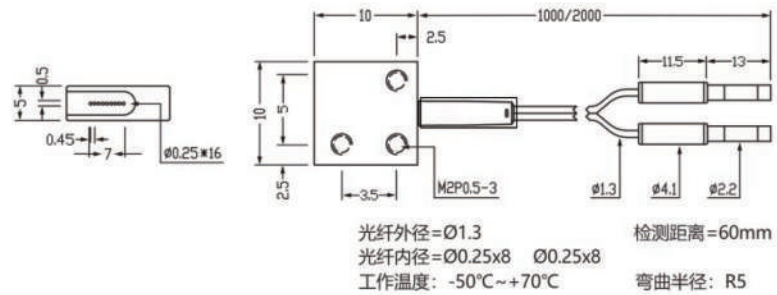


BR10Q2-1M/2M

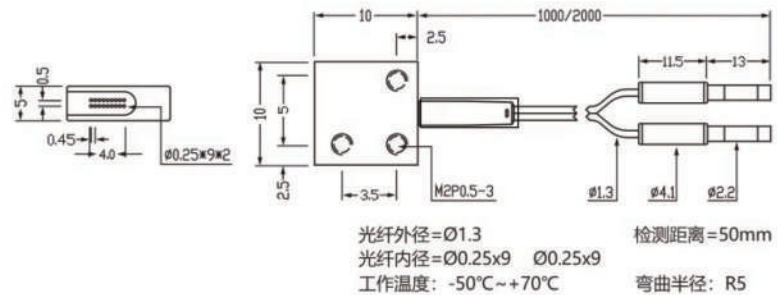


BR05Q-1M/2M

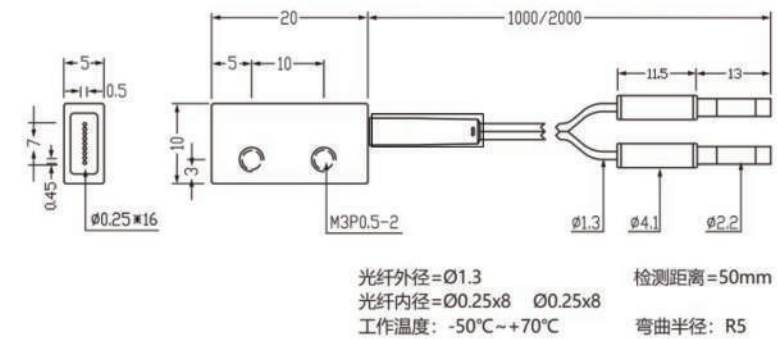


BR05Q2-1M/2M

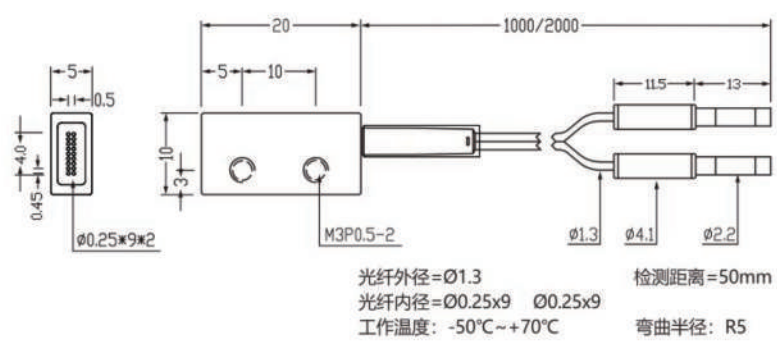

BR07Q2-1M/2M

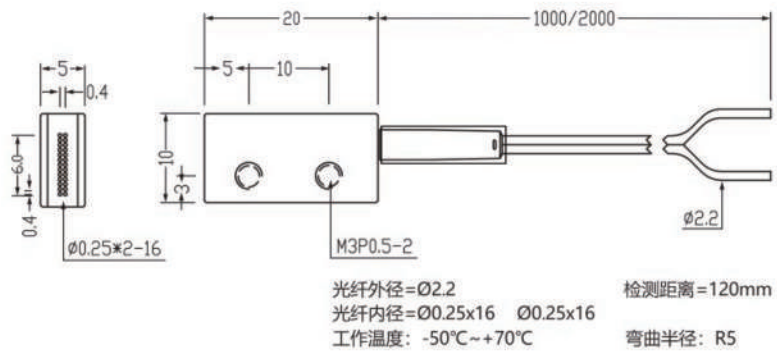


BR15Q-1M/2M

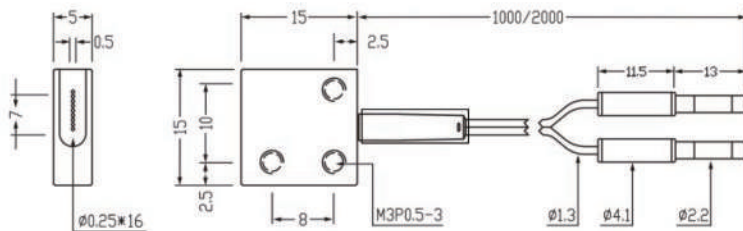

光纤外径=Ø1.3
 光纤内径=Ø0.25x8 Ø0.25x8
 工作温度: -50°C~+70°C

检测距离=50mm
 弯曲半径: R5


BR15Q2-1M/2M

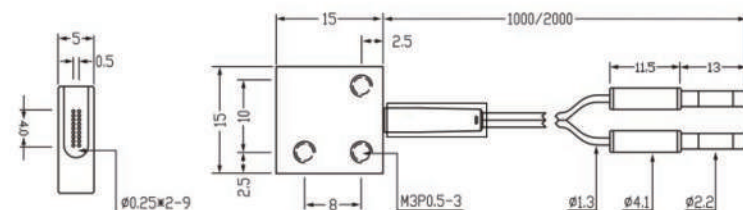

光纤外径=Ø1.3
 光纤内径=Ø0.25x9 Ø0.25x9
 工作温度: -50°C~+70°C

检测距离=50mm
 弯曲半径: R5


BR15C-1M/2M

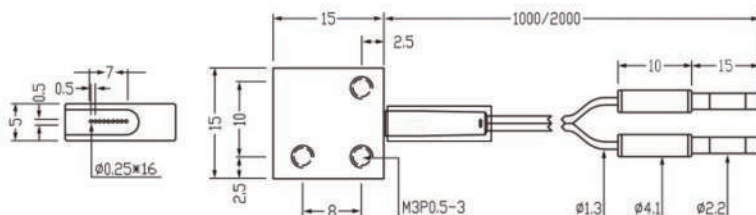

光纤外径=Ø1.3
光纤内径=Ø0.25x8 Ø0.25x8
工作温度: -50℃~+70℃

检测距离=50mm
弯曲半径: R5


BR15C2-1M/2M

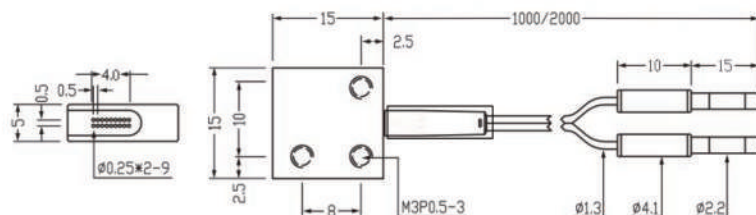

光纤外径=Ø1.3
光纤内径=Ø0.25x9 Ø0.25x9
工作温度: -50°C~+70°C

检测距离=50mm
弯曲半径: R5


BR20Q-1M/2M

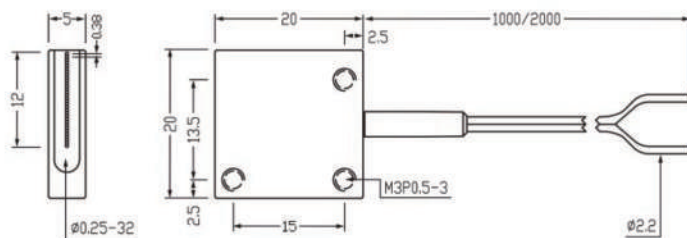


光纤外径=Ø2.2
光纤内径=Ø0.25x16 Ø0.25x16
工作温度: -50℃~+70℃

規格/尺寸


BR20Q2-1M/2M

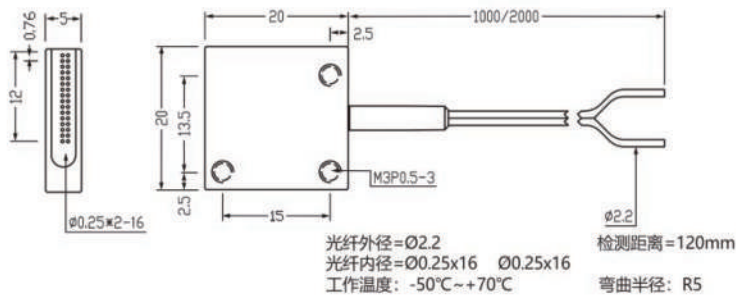


BR20C-1M/2M

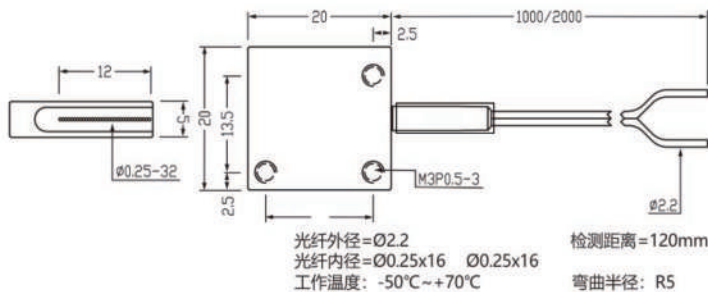


BR20C2-1M/2M

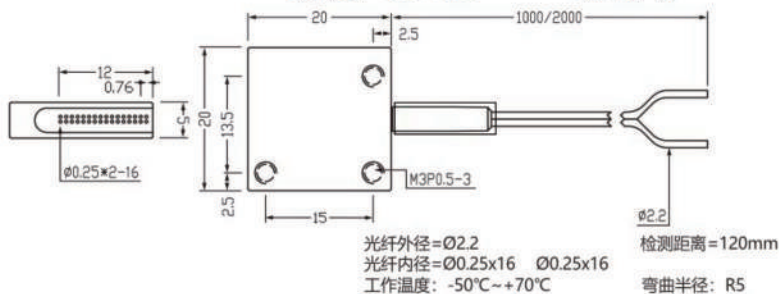


BR20ML-1M/2M

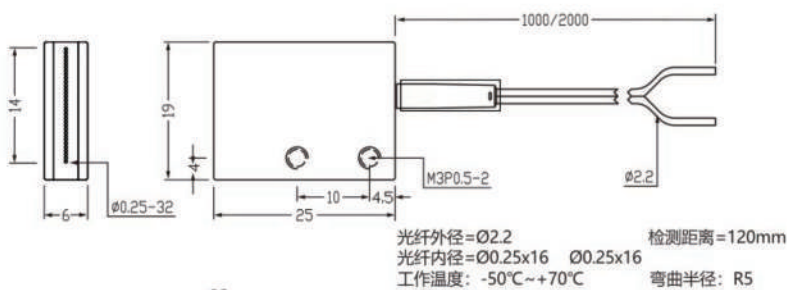

BR-V73BC-1M/2M

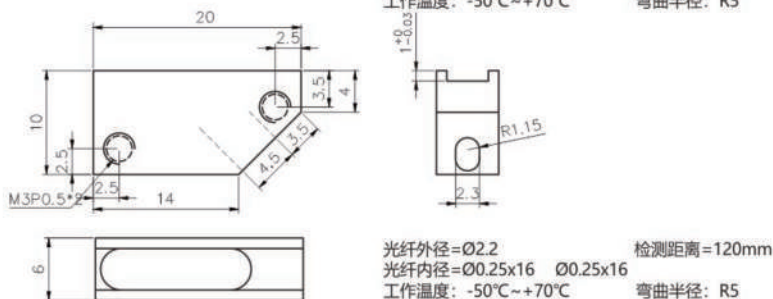


BU-11-1M/2M

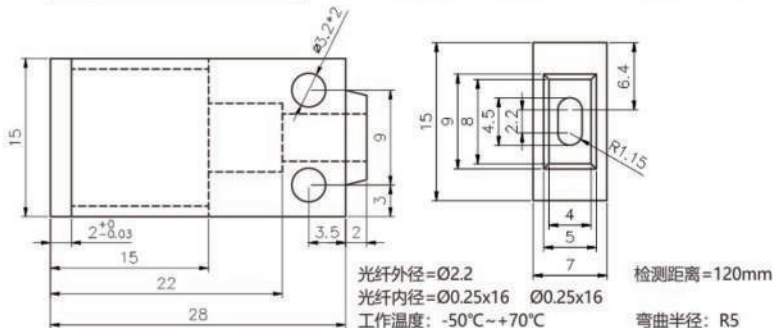


規格/尺寸


BR-A05-1M/2M

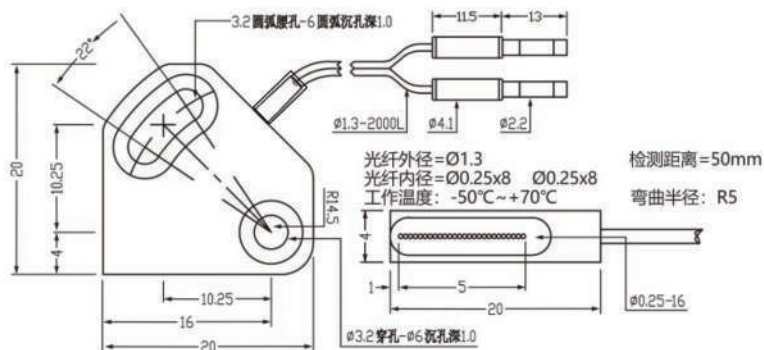


BR-A10-1M/2M

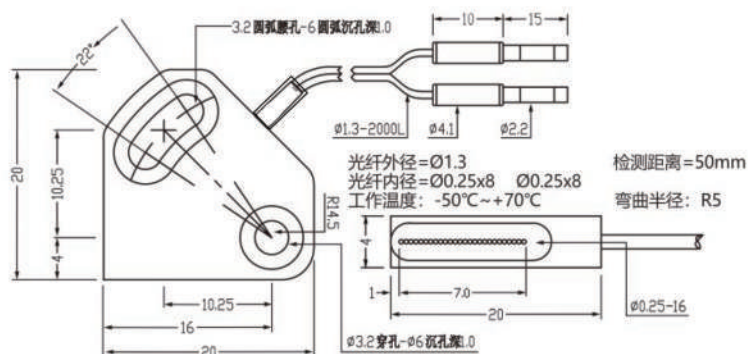


BU-E11-1M/2M

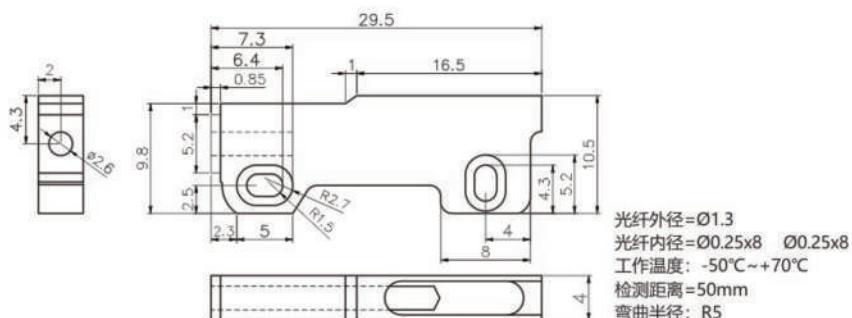

BR25QL-1M/2M

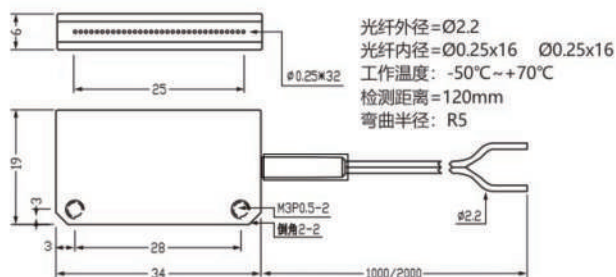


BR30QL-1M/2M

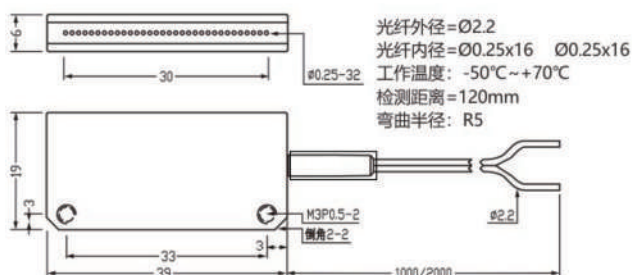


規格/尺寸


BR35QL-1M/2M

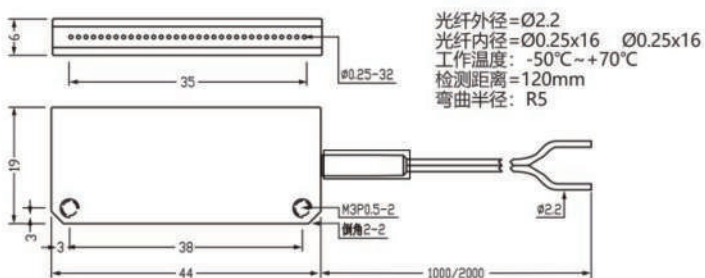



BR40QL-1M/2M

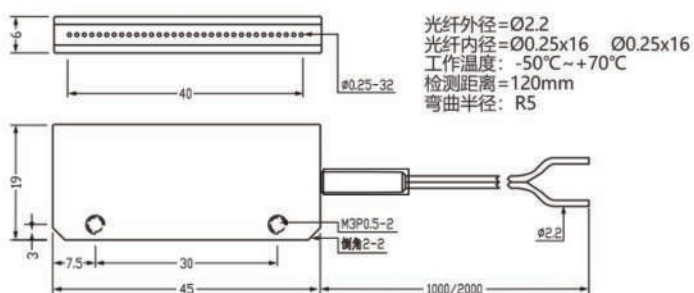

BR50QL-1M/2M

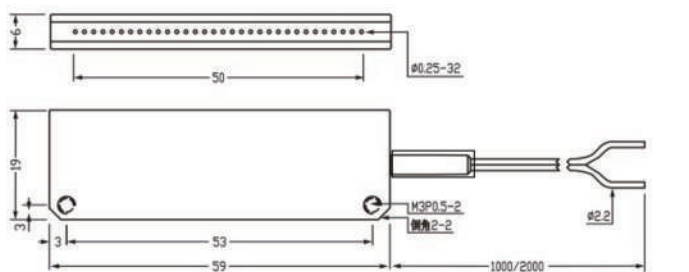

BR70QL-1M/2M

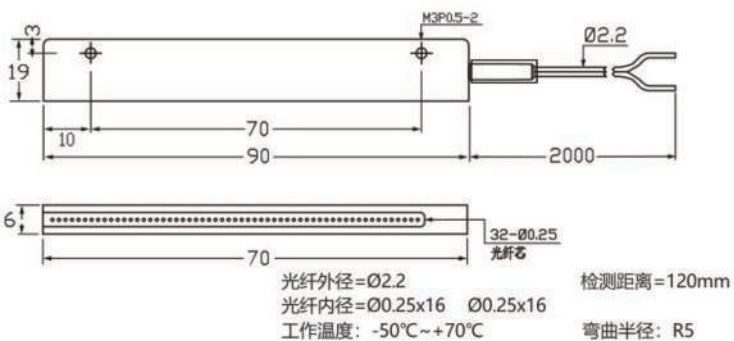

BR100QL-1M/2M

