

特点

- 零背隙
- 刚性大
- 材质：不锈钢
- 适合译码器、小马力传动机构、高精度传动上
- 固定方式：夹紧式
- 一体成型
- 偏角误差较佳
- 不锈钢材质扭力较佳




规格

型 号	一般扭力 (N.m)	最大扭力 (N.m)	最高回转速 (Rpm/min)	惯 性 (Kg·m ²)	容许偏心 (mm)	容许偏角 (°)	容许轴向位差 (mm)
SCTS-12C	0.3	0.6	12000	2.2×10^{-7}	0.10	2	±0.2
SCTS-16C	0.5	1.0	9500	9.0×10^{-7}	0.10	2	±0.3
SCTS-20C	1.0	2.0	7600	2.5×10^{-6}	0.10	2	±0.3
SCTS-25C	2.0	4.0	6100	7.1×10^{-6}	0.15	2	±0.4
SCTS-32C	3.5	7.0	4800	2.7×10^{-5}	0.15	2	±0.5
SCTS-40C	8.0	16.0	3800	9.0×10^{-5}	0.20	2	±0.5
SCTS-50C	15.0	30.0	3100	2.8×10^{-4}	0.20	2	±0.5
SCTS-63C	35.0	70.0	2400	8.8×10^{-4}	0.20	2	±0.5


尺寸

型 号	D	I	L	G	H	M	d1xd2 标准孔径公差(H7)		重 量(g)
							Min	Max	
SCTS-12C	12	5.0	18.5	2.5	4.0	M2	3	5	10.0
SCTS-16C	16	6.5	23.0	3.25	5.0	M2.5	4	6	25.0
SCTS-20C	20	7.5	26.0	3.75	6.5	M3	5	8	43.0
SCTS-25C	25	8.5	31.0	4.25	9.0	M3	6	10	78.0
SCTS-32C	32	12.0	41.0	6.0	11.0	M4	8	14	170.0
SCTS-40C	40	15.0	56.0	8.5	14.0	M5	8	16	370.0
SCTS-50C	50	18.0	71.0	10.5	18.0	M6	12	22	750.0
SCTS-63C	63	22.0	90.0	13.0	24.0	M8	14	35	1400.0

订购型号：SCTS-øD-C- ød1 - ød2

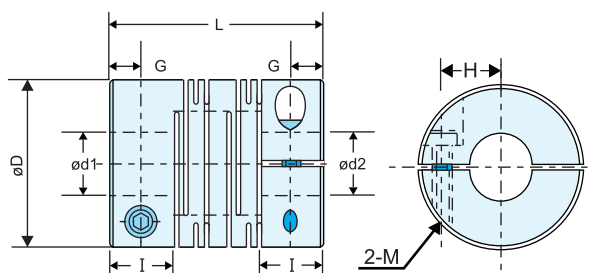

外径ø16~ø32

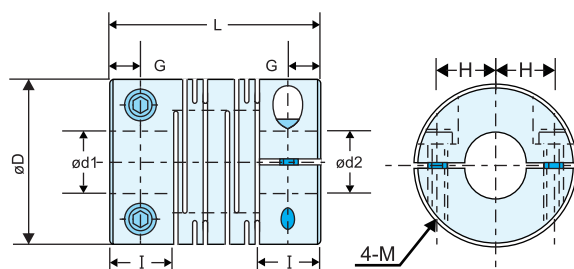

外径ø40~ø63